

Anti-Vandal Pushbuttons capacitive, waterproof, illuminated




Specifications:


Contact rating:	5 to 24 V DC, 1 A
Contact resistance:	<1 Ω
Operating temperature:	-20 °C to +65 °C
Electrical life:	minimum 50 000 000 operations
Material:	aluminum, PC
Terminals:	wire with female 2.54 mm pitch connector
Protection:	IP 68 sealed
Mounting:	single-hole mounting, panel thickness 8 mm max.

Models: Switching functions


CTK 16 L-A1-F1FG00-3CD201 off – on

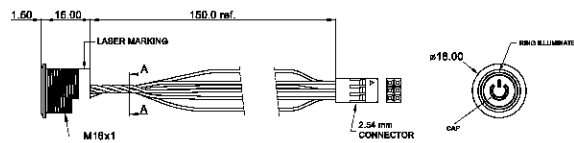

CTK 19 M-A1-F1FB00-3CD101 off – mom

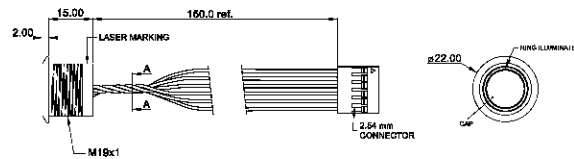

CTK 22 L-A1-F1FB00-3CD101 off – on

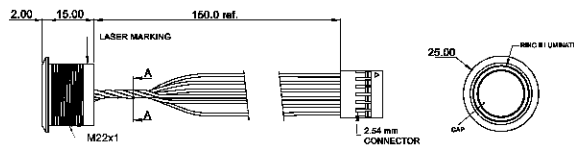

Ordering code:

CTK - A1 - F1 F -

<p>Bushing:</p> <p><input type="checkbox"/>16 16 mm</p> <p><input type="checkbox"/>19 19 mm</p> <p><input type="checkbox"/>22 22 mm</p>	<p>Rating:</p> <p><input type="checkbox"/>A1 1A/5...24V DC</p>	<p>Button:</p> <p><input type="checkbox"/>F Flat</p>	<p>LED color:</p> <p><input type="checkbox"/>3C RGB</p> <p><input type="checkbox"/>L3 green/blue</p>
<p>Switching function:</p> <p><input type="checkbox"/>M off – mom</p> <p><input type="checkbox"/>L off – on</p>	<p>Bushing material:</p> <p><input type="checkbox"/>F1 Aluminium, natural</p>	<p>Illumination/Symbol:</p> <p><input type="checkbox"/>G00 Ring illum. and stand-by symbol</p> <p><input type="checkbox"/>B00 Ring illum.</p>	<p>Leads:</p> <p><input type="checkbox"/>D201 150 mm length (for CTK 16)</p> <p><input type="checkbox"/>D202 300 mm length (for CTK 16)</p> <p><input type="checkbox"/>D101 150 mm length (for CTK 19 and 22)</p> <p><input type="checkbox"/>D102 300 mm length (for CTK 19 and 22)</p>