

Anti-Vandal Pushbutton Switches




Specifications:

Insulation resistance: > 1000 MΩ at 500 V DC
 Operating temperature: -20 °C to +55 °C
 Switching force: off – mom
 Material: Contact: silver plated alloy
 Nut: nickel plated brass

Models:



MAV 01 B1M1

Rating: 125 V AC, 2 A / 48 V DC, 2 A
 Contact resistance: <10 mΩ
 Dielectric strength: 3000 V, 50 Hz (1 min.)
 Electrical life: 10 000 cycles

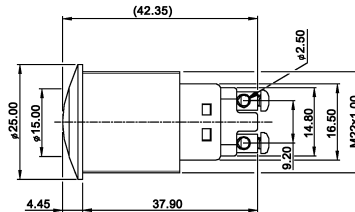

MAV 01 B2M1R

Rating: 36 V DC, 2 A
 Contact resistance: < 50 mΩ
 Dielectric strength: 2000 V, 50 Hz (1 min.)
 Electrical life: 200 000 cycles
 Protection: IP 65

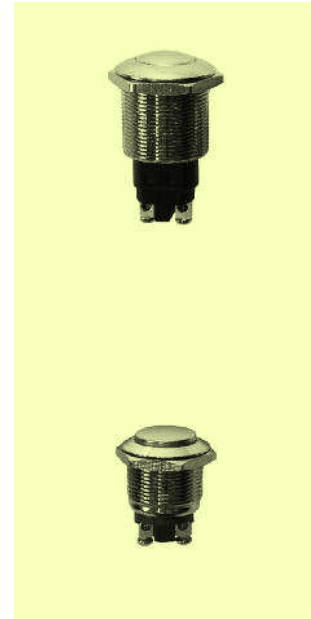

Ordering code: MAV 01

Bushing size
 Terminals
 Button style
 Material of button/case

Bushing size:

B1 M22

B2 M19

Terminals:

M1 Screw

M3 Solder (for B2)

Button style:

Curved

F Flat (for B2)

R Raised (for B2)

Material of button/case:

Brass, nickel plated

1 Brass, gold plated (for B2)

2 Stainless steel (for B2)

3 Zinc alloy, nickel plated black (for B2)