




P.C.B. LAND DIMENSION ± 0.05

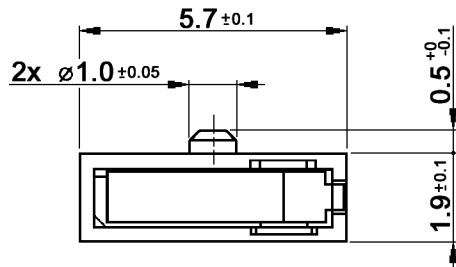

CIRCUIT DIAGRAM

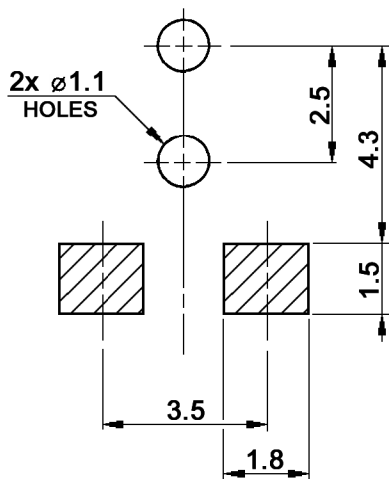

DEATAIL P

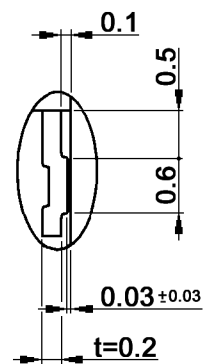

Compliance: RohS III (2015/863/EU)

Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm		Date	Name
		03/15	dr
Operating temperature	06/24	dr	
Revised	12/21	dr	
Operating temperature	03/16	dr	
Mechanical life	11/15	dr	
Modifications	Date	Name	

DTS 208 CP R-T-1

knitter-switch

30 32 98


Page

1/3

Specifications:

Contact rating: 10mA, 5V DC (min. 0.1mA)
Contact resistance: 500mOhm max.
Insulation resistance: 100MOhm min. at 500V DC for 1 minute
Dielectric strength: 500V AC (50/60Hz, 2mA) for 1 minute
Operating temperature: -20°C to +70°C
Mechanical life: 100 000 cycles
Operating force: 28gf max.
Material: Contact clip: stainless steel, silver plated
 Terminal: brass strip, silver plated
 Case / slider: PA9T, black



Soldering conditions:

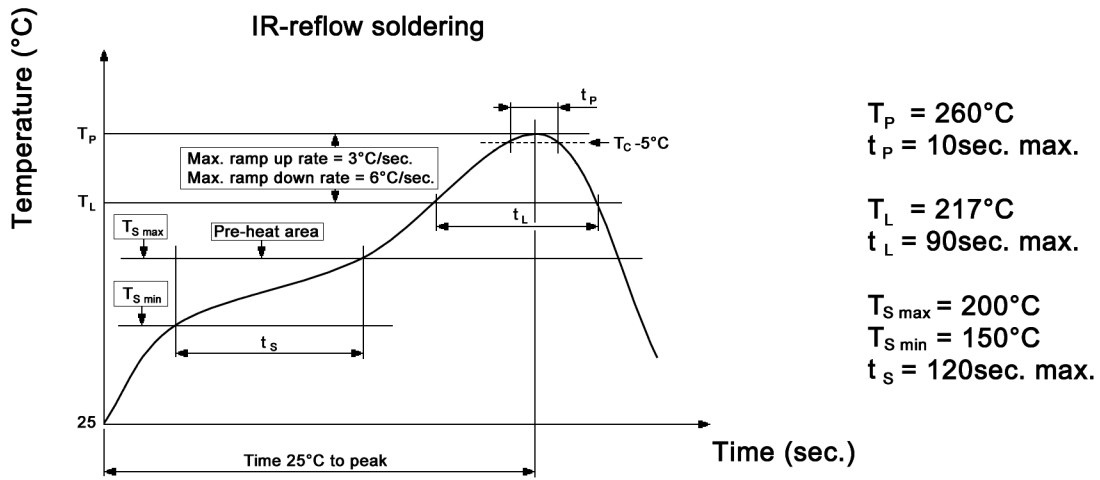


Compliance: RohS III (2015/863/EU)

Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm		Date	Name	<h1>DTS 208 CP R-T-1</h1>
		03/15	dr	
Operating temperature	06/24	dr		<h2>30 32 98</h2>
Revised	12/21	dr		
Operating temperature	03/16	dr		
Mechanical life	11/15	dr	knitter-switch	Page
Modifications	Date	Name		2/3


Packaging:



DETAIL A



CARRIER TAPE

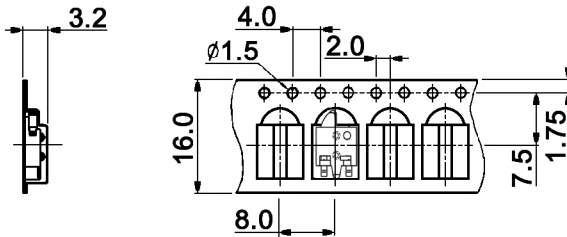

COVER TAPE



Packaging unit: 2500 pcs. / reel
 Compliance: RohS III (2015/863/EU)

Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm		Date	Name
		03/15	dr
Operating temperature	06/24	dr	
Revised	12/21	dr	
Operating temperature	03/16	dr	
Mechanical life	11/15	dr	
Modifications	Date	Name	

DTS 208 CP R-T-1

knitter-switch

30 32 98

Page

3/3