

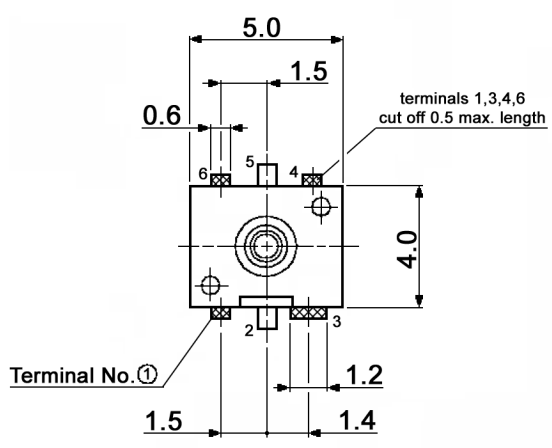


**HOLE LAYOUT**

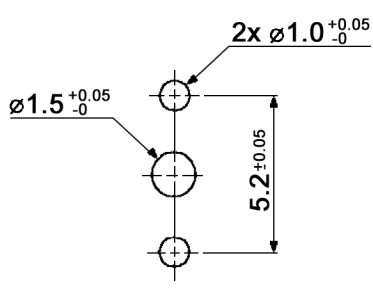

**CIRCUIT DIAGRAM**



**Specifications:**

- Contact rating: 0.1A, 30V DC
- Contact resistance: 500mOhm max.
- Insulation resistance: 100MOhm min. at 100V DC for 1 minute
- Dielectric strength: 100V AC (50/60Hz, 2mA) for 1 minute
- Operating temperature: -10°C to +60°C
- Mechanical life: 50 000 cycles
- Electrical life: 50 000 cycles
- Operating force: 30 +/-10gf
- Soldering conditions: 260 +/-5°C, 10 +/-1sec.
- Material: Clip: phosphor bronze, silver plated  
Terminal: brass strip, silver plated  
Case / cover / slider: PA46, black  
Spring: stainless steel, silver plated

Compliance: RohS II (2011/65/EU)

Tolerances: up to 10: ±0.20mm above 10-50: ±0.30mm	Date	Name
	11/12	dr
Rename	04/14	dr
Modifications	Date	Name

**DT 106 CP**

**knitter-switch**

**30 27 43**