


Detector Switches

Specifications:


Contact rating:	5V DC, 10 mA
Contact resistance:	< 500 mΩ
Insulation resistance:	> 100 MΩ
Dielectric strength:	100 V, 50 Hz for the duration of 1 minute
Operating temperature:	-40 °C to +85 °C
Operating force:	≤ 0.15 N
Mechanical life:	minimum 3 000 000 operations (DTS 316 C-T: 600 000)
Material:	Contacts, Terminals: phosphor-bronze, silver-plated Case and actuator: HTN, black Cover: steel, tin-plated

Models: Switching functions

DT 316 C off – mom

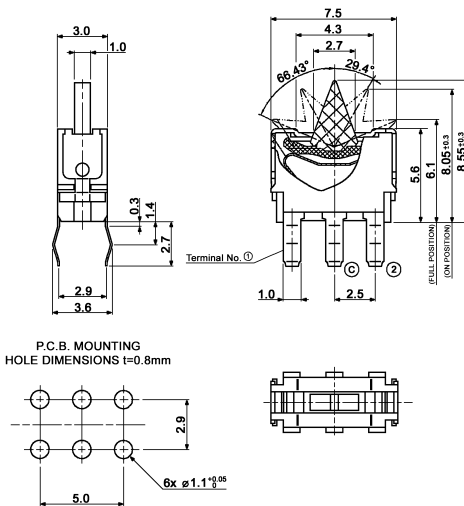

DTS 316 C T off – mom

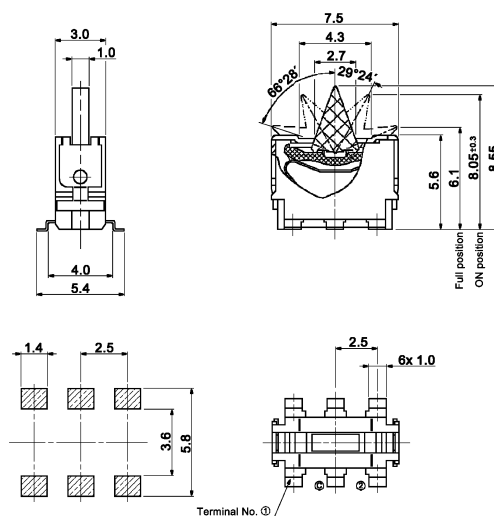

Packing: DT 316 C: bag
DTS 316 C-T: 550 pcs/reel

