

Dual-in-line Switches


Specifications:

Contact rating:	24 V DC, 25 mA / 6 V DC, 100 mA
Contact resistance:	< 50 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	-40 °C to +85 °C
Mechanical life:	minimum 2 000 operations per pole
Material:	PPS meets UL 94 V-0
Contacts:	gold-plated over nickel
Construction:	case sealed
	Series DBS 1000: slide recessed, front sealed with protective tape, washable
Mounting:	on pc-board
Slide position:	OFF
Soldering conditions:	wave-soldering – max.: 5 sec, 260 °C

Models:

Series DBS 1000

Type	Poles	Length (A)
DBS 1001	1	3.48 mm
DBS 1002	2	6.02 mm
DBS 1003	3	8.56 mm
DBS 1004	4	11.10 mm
DBS 1005	5	13.64 mm
DBS 1006	6	16.18 mm
DBS 1007	7	18.72 mm
DBS 1008	8	21.26 mm
DBS 1009	9	23.80 mm
DBS 1010	10	26.34 mm
DBS 1012	12	31.42 mm

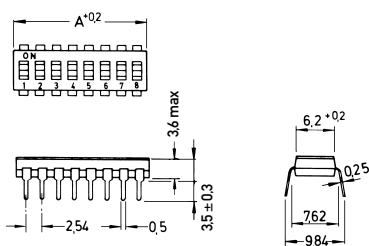

Series DBS 1100

Type	Poles	Length (A)
DBS 1101	1	3.48 mm
DBS 1102	2	6.02 mm
DBS 1103	3	8.56 mm
DBS 1104	4	11.10 mm
DBS 1105	5	13.64 mm
DBS 1106	6	16.18 mm
DBS 1107	7	18.72 mm
DBS 1108	8	21.26 mm
DBS 1109	9	23.80 mm
DBS 1110	10	26.34 mm
DBS 1112	12	31.42 mm

