






# Half-pitch Dual-in-line Switches

## Specifications:

Contact rating:	24 V DC, 100 mA (non-switching), 24 V DC, 25 mA (switching)
Contact resistance:	< 100 mΩ
Insulation resistance:	> 100 MΩ
Dielectric strength:	300 V, 50 Hz for the duration of 1 minute
Operating temperature:	-25 °C to +70 °C
Mechanical life:	minimum 1000 operations per pole
Materials:	Case: PA, UL 94 V-0, black Slide: PA, UL 94 V-0, ivory Contacts and Terminals: copper-alloy, gold-plated over nickel
Mounting:	on pc-board – SMD
Slide position:	OFF

## Model:

Type	Poles	Length (A)
DHP 602	2	3.68 mm
DHP 604	4	6.22 mm
DHP 606	6	8.76 mm
DHP 608	8	11.30 mm
DHP 610	10	13.84 mm

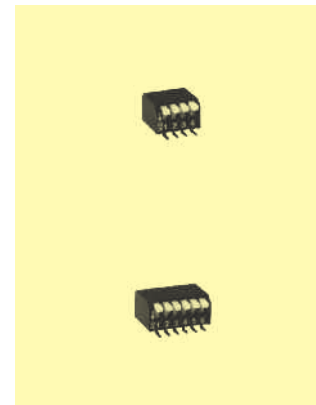

## Packing:

Type	Tape	Stick
DHP 602	900 pieces	146 pieces
DHP 604	900 pieces	85 pieces
DHP 606	900 pieces	60 pieces
DHP 608	900 pieces	47 pieces
DHP 610	900 pieces	39 pieces