



1 pole switch has the ON printing
2-12 poles switch have the ●N printing

xx	Poles	A
01	1	2.50
02	2	5.04
03	3	7.58
04	4	10.12
05	5	12.66
06	6	15.20
07	7	17.74
08	8	20.28
09	9	22.82
10	10	25.36
12	12	30.43

WIRING DIAGRAM



P.C.B. LAYOUT

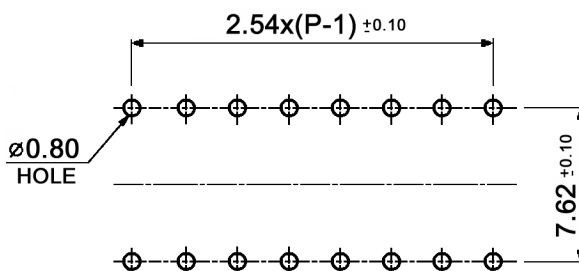

Specifications:

- Contact rating: switching: 25mA, 24V DC
non-switching: 100mA, 50V
- Contact resistance: 50mOhm max.
- Insulation resistance: 1000MOhm min. at 100V DC
- Dielectric strength: 500V DC for 1 minute
- Operating temperature: -40°C to +85°C
- Storage temperature: -40°C to +85°C
- Mechanical life: 5 000 cycles
- Operating force: 800gf max.
- Soldering conditions: wave soldering: 260°C +/-5°C, 5 +/-1sec.
- Material: all material used UL94V-0 grade fire retardant plastic
Movable contact.: BeCu, gold plated over nickel
Fixed contact: brass, gold plated over nickel
Terminal: brass, tin plated over nickel
Sealing: protective tape

Washable by water or alcohol-based cleaners



Tolerances: 0-1: ±0.03mm 1-4: ±0.05mm 4-16: ±0.07mm 16-63: ±0.10mm	Date	Name	<h1>DBS 600xx</h1>
	12/13	dr	
Specifications	01/14	dr	<h2>30 29 93</h2>
Modifications	Date	Name	
			Page 1/1