


xx	Poles	A	B
01	1	3.48	0
02	2	6.02	2.54
03	3	8.56	5.08
04	4	11.10	7.62
05	5	13.64	10.16
06	6	16.18	12.70
07	7	18.72	15.24
08	8	21.26	17.78
09	9	23.80	20.32
10	10	26.34	22.86
12	12	31.42	27.94

P.C.B. LAYOUT

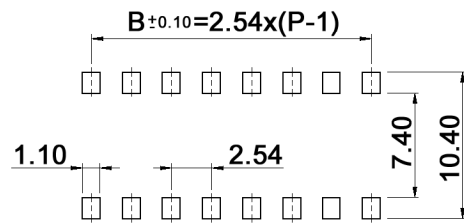

Tolerances:			Date	Name
Revised	10/13	dr	03/05	dr
ON position	10/12	dr		
SBS 1001 added	01/12	dr		
Delivery position	10/10	dr		
Vibration / shock	06/10	dr		
Specifications	03/09	dr		
Operating force	01/07	dr		
RoHS compliant	08/05	dr		
Modifications	Date	Name		

SBS 10xx

knitter-switch


30 05 91

Page

1/2

Specifications:

Contact rating: 25mA, 24V DC / 100mA, 6V DC
 min.: 0.1mA, 3V DC
Contact resistance: 50mOhm max.
Insulation resistance: 100MOhm min. at 500V DC
Dielectric strength: 500V, 50Hz for the duration of 1 minute
Operating temperature: -40°C to +85°C
Storage temperature: -40°C to +85°C
Mechanical life: min. 2 000 cycles
Operating force: 10N max.
Slide position: off (excepted SBS 1004 T-IS: pos. 3 is ON; pos. 1,2,4 is OFF)
Vibration: MIL-STD 202F, method 201A
Shock: MIL-STD 202F, method 213B, condition A
Construction: case sealed, slides recessed, front sealed with protective tape
Mounting: on pc-board - SMD
Material: PPS meets UL94V-0
 Terminal: gold flush over nickel 30-100u"
 Contact: gold plated 3u" over nickel 30-100u"
Sealing: by protective tape, washable by aqueous detergents and isopropyl alcohol
Soldering conditions:

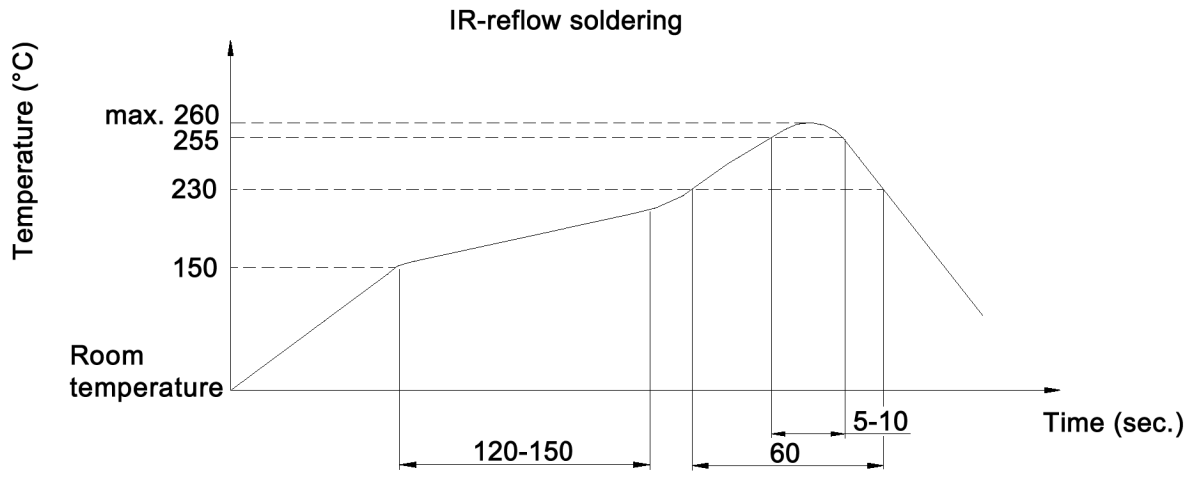

Tolerances:			Date	Name	SBS 10xx	30 05 91	Page
			03/05	dr			
			knitter-switch	2/2			
Modifications	Date	Name					