



Specifications:

Power supply:	3 to 5 V DC, 20 mA max.
Insulation resistance:	> 10 MΩ
Dielectric strength:	60 V, 50 Hz for the duration of 1 minute
Operating temperature:	-40 °C to +85 °C
Detent torque:	2.6 Ncm
Pulses/Detents per turn:	8/16
Frequency response:	1 Hz max.
Electrical life:	> 100 000 cycles
Pushbutton:	Contact rating: 5 V DC, 10 mA, min. 1 mA
	Contact resistance: < 100 mΩ
	Operating force: 6 N
	Mechanical Life: > 30 000 cycles
	Travel: 0.8 mm
Mounting:	single hole mounting, thread M9x0.75


Models:

MEOP 13 P8P16D11F000

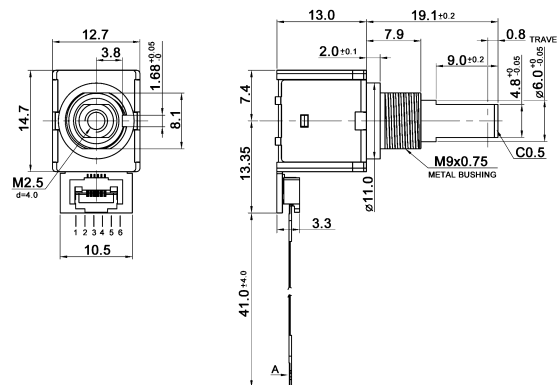

10

Output signal format:

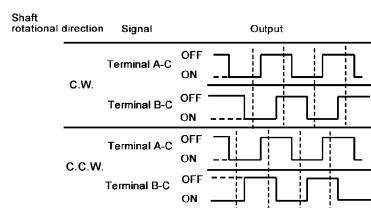

Schematic:

