
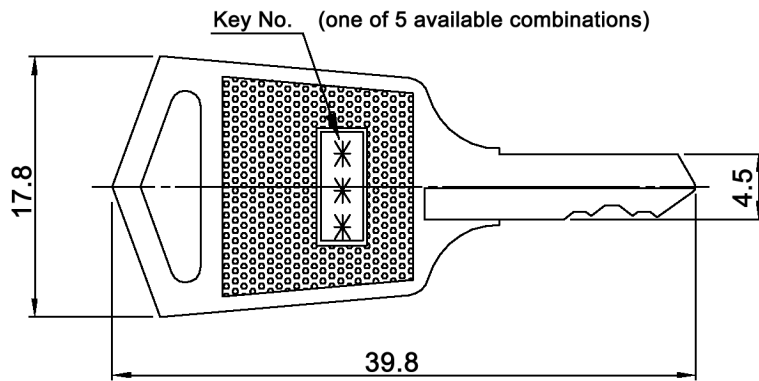


Key removable in pos. A only

RECOMMENDED HOLE SIZE



Specifications:

- Contact rating: 200 mA, 125 V AC
- Contact resistance: 10 mOhm max.
- Insulation resistance: 200 MOhm min.
- Dielectric strength: 1000 V, 50 Hz for the duration of 1 minute
- Operating temperature: -20°C to +70°C
- Mechanical life: 6 000 steps min.
- Material: Case: zinc alloy, chromium plated
Contacts / terminals: silver plated
Key: brass, nickel plated

Compliance: RohS III (2015/863/EU)

Tolerances:	>0: ±0.1 mm	Date	Name	<h1>MRK 1091 B-1</h1>
	>6: ±0.2 mm	01/20	dr	
	>30: ±0.3 mm			
	>120: ±0.5 mm			
Specifications	09/22	dr	<h2>knitter-switch</h2>	<h1>30 43 40</h1>
Modifications	Date	Name		
				1/1