

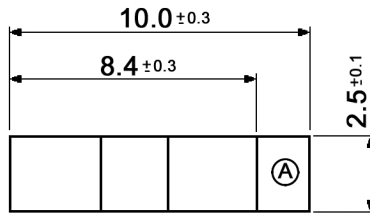


CONFIGURATION



P.C.B. LAYOUT

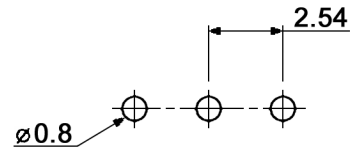

Specifications:

- Contact rating: 0.2A, 24V; 0.5A, 12V
- Contact resistance: 50mOhm max.
- Insulation resistance: 10 000MOhm min. at 500V DC
- Dielectric strength: 500V AC for 1 minute (2mA)
- Operating temperature: -40°C to +105°C
- Storage temperature: -40°C to +105°C
- Mechanical life: 5 000 cycles
- Operating force: 800gf max.
- Packing: 53 pcs. / tube
- Soldering conditions: max.: 260 +/-3°C, 3sec.
- Material: Case: PA66 glass reinforced nylon, blue
Slider: PA46 glass reinforced nylon, ivory
Terminals: brass, 0.075µm gold plated over 1µm nickel
Fixed contact: brass, 0.075µm gold plated over 1µm nickel
Movable contact: phosphor bronze, 0.125µm gold plated over 1µm nickel

Compliance: RohS III (2015/863/EU)

| | | | | |
|----------------|-------|-------|-----------------------|---------------------|
| Tolerances: | | Date | Name | <h1>MMP 1010 D</h1> |
| | | 01/03 | us | |
| | | | | |
| | | | | |
| Circuit | 07/22 | dr | | <h2>30 03 40</h2> |
| Temperatures | 09/16 | dr | | |
| Specifications | 01/13 | dr | knitter-switch | |
| Slider colour | 09/12 | dr | | |
| Modifications | Date | Name | | |