



CIRCUIT DIAGRAM
C: COMMON PIN



HOLE LAYOUT
TOP VIEW $\oplus 0.05$

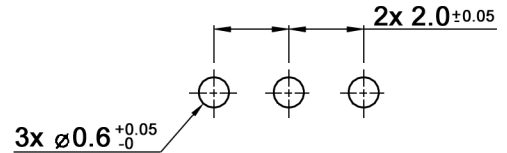

Specifications:

- Contact rating: 0.5 A, 4 V DC
- Contact resistance: 70 mOhm max.
- Insulation resistance: 100 MOhm min. at 100 V DC for 1 minute
- Dielectric strength: 100 V AC (50/60 Hz, 2mA) for 1 minute
- Operating temperature: -40°C to +85°C
- Mechanical life: 10 000 cycles
- Operating force: 150 +/-100gf
- Soldering conditions: pre-heat: max. 100°C, max. 60 sec.
soldering: max. 260°C, max. 3-5 sec.
- Material: Terminal: brass strip, silver plated
Case / slider: nylon, black
Cover: SUS, washing
Contact plate: SUS, silver plated

Compliance: RohS III (2015/863/EU)

Tolerances: up to 10: ±0.2 mm above 10-50: ±0.3 mm	Date	Name
	04/21	dr
Modifications	Date	Name

MMP 124 R-N

knitter-switch

30 46 08

Page

1/1