



CIRCUIT DIAGRAM  
BOTTOM VIEW



HOLE LAYOUT  
TOP VIEW

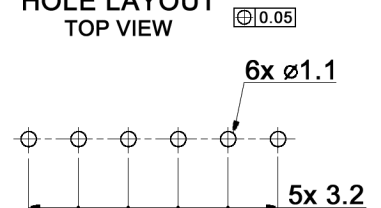

Specifications:

- Contact rating: 0.35A, 30V DC
- Contact resistance: 20mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC for 1 minute
- Dielectric strength: 500V AC (50/60Hz, 2mA) for 1 minute
- Operating temperature: -40°C to +85°C
- Storage temperature: -40°C to +85°C
- Mechanical life: 10 000 cycles
- Operating force: 250 +/-100 gf
- Soldering conditions: 260 +/-5°C, 5 +/-1sec.
- Material: Terminal: brass, silver plated  
Base: phenolic resin, natural  
Frame: steel, nickel plated  
Contact plate: brass, silver plated  
Spring: SWC, temper  
Slider: PA66, black

Compliance: RohS III (2015/863/EU)

Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm		Date	Name	<h1>MFP 150</h1>
		12/20	dr	
			<b>knitter-switch</b>	<h2>30 45 45</h2>
Modifications	Date	Name		1/1