





# Illuminated Pushbutton Switches waterproof

## Specifications:

Contact rating:	250 V AC, 200 mA    48 V AC, 500 mA    50 V DC, 200 mA
Contact resistance:	<50 mΩ
Insulation resistance:	>1000 MΩ
Dielectric strength:	1000 V, 50 Hz for the duration of 1 minute
Operating temperature:	-30 °C to +85 °C
Operating force:	3.5 N ± 1.5 N
Mechanical life:	minimum 1 000 000 operations
Material:	Surface of contacts, terminals: gold over silver plated Base: DAP, UL 94 V-0 Case: Zinc alloy Cap: PA 66
Ingress Protection:	IP 67
Mounting:	bushing M 12 x 0.75, key 14 mm
Soldering conditions:	hand-soldering – max. 5 sec, 350 °C
Travel:	1.5 mm

## Models:                      Switching functions

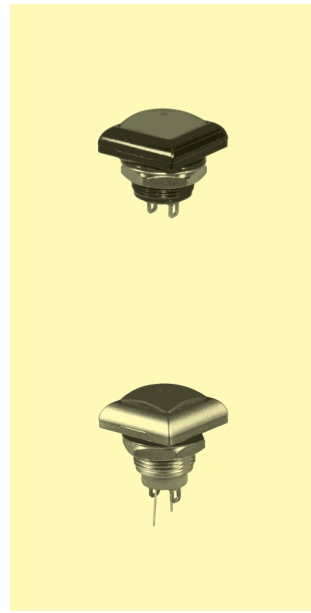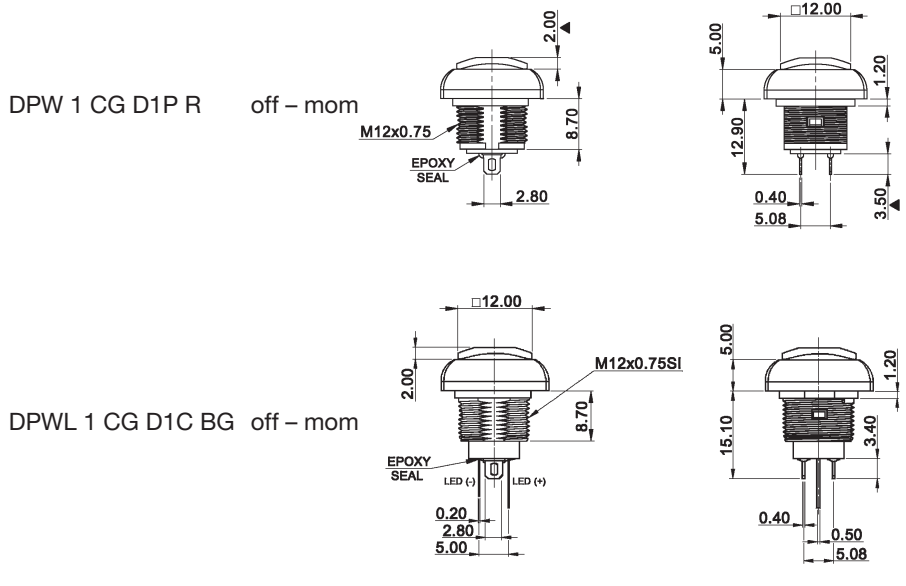

## Ordering Code:

