



















Miniature Slide Switches



Specifications:

Contact rating:	30 V DC, 350 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	- 10 °C to + 85 °C
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Contact timing:	shorting (non-shorting only if specified)
Slide colour:	black, further colours on request
Soldering conditions:	wave-soldering – max.: 5 sec, 260 °C ± 5 °C

6

Models:	Operating positions		Length (mm)		 		
			A	B			
MFP 1220	2		13.0	7.5			
MFP 1320	3		15.5	10.0			
MFP 1620	6		23.0	17.5			
MFP 1220 – R	2		13.0	7.5			
MFP 1320 – R	3		15.5	10.0			
MFP 1323	3		15.5	10.2			
MFP 1424	4		18.0	12.5			
MFP 1323 – R	3		15.5	10.1			



Miniature Slide Switches



Models: Operating positions Length (mm)
 A B

MFP 2220
 MFP 2320
 MFP 2520

2
 3
 5



13.0 7.5
 15.5 10.0
 20.5 15.0

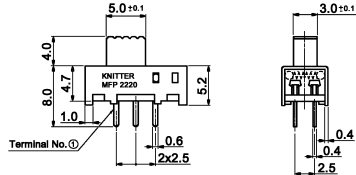


MFP 2323
 MFP 2424

3
 4



16.0 10.1
 18.0 12.6




MFP 2220 - R
 MFP 2320 - R

2
 3



17.0 6.5
 19.5 9.0



MFP 2323 - R

3



19.5 9.0

