


# Subminiature Rotary Coded Switches for SMT

## Specifications:


Contact rating:	24 V DC, 25 mA switching
Contact resistance:	< 100 mΩ
Insulation resistance:	> 1000 MΩ
Dielectric strength:	250 V, 50 Hz for the duration of 1 minute
Operating temperature:	-25 °C to +70 °C
Mechanical life:	minimum 2000 operations
Terminals:	phosphor bronze, gold-plated over nickel barrier
Material:	case: PBT black, meets UL 94 V-0, washable, rotor: white; inverse type red
Mounting:	on pc-board

## Models: Code


SMR 20010 BCD  
SMR 20110 BCD Inverse

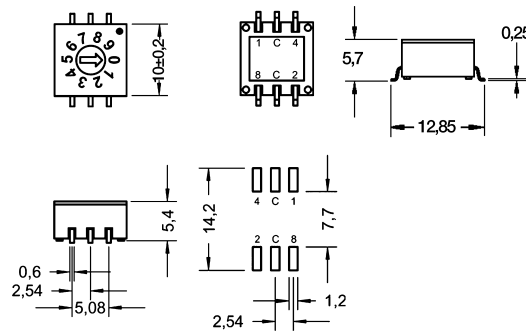

SMR 20016 Hexadecimal  
SMR 20116 Hexadecimal Inverse

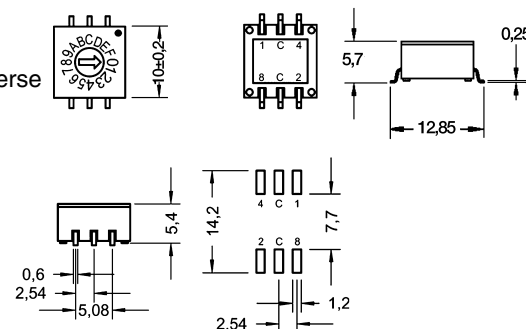

washable

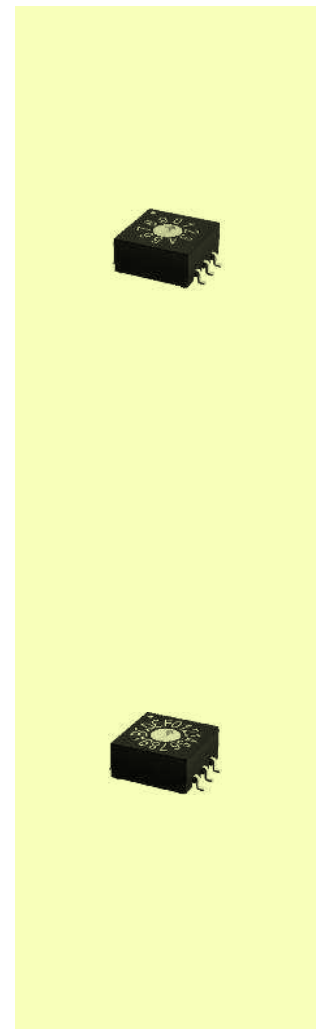

Packing: 700 pieces per reel