


# Subminiature Rotary Coded Switches for SMT

## Specifications:



Contact rating:	50 V DC, 100 mA, non switching 15 V DC, 30 mA, switching
Contact resistance:	< 100 mΩ
Insulation resistance:	> 1000 MΩ at 250 V DC
Dielectric strength:	250 V, 50 Hz for the duration of 1 minute
Operating temperature:	-40 °C to +85 °C
Mechanical life:	minimum 20 000 operations
Contacts:	phosphor bronze, gold-plated
Terminals:	phosphor bronze, gold-plated
Case material:	PPS black, rotor: standard types yellow; inverse types red
Construction:	case totally sealed with protective tape
Mounting:	on pc-board – SMD

washable

<b>Models:</b>	Code
SMR 5010	BCD
SMR 5110	BCD Inverse

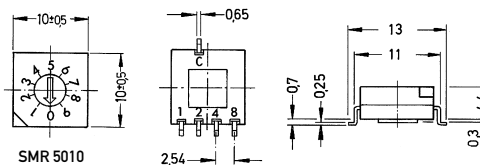

SMR 5016	Hexadecimal
SMR 5116	Hexadecimal Inverse

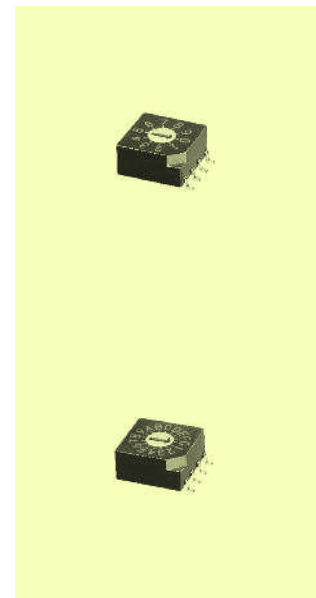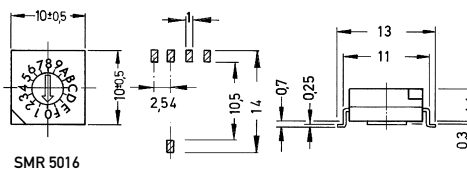

Packing: sticks or tapes  
for order on tape: additional to type number: T  
example of order: SMR 5010 T

Stick	Tape	Reel
48 pieces	500 pieces	∅ 330 mm

