

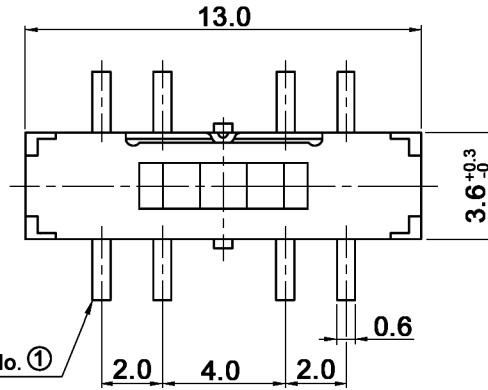


8x **A** common tolerances zone


\square 0.1

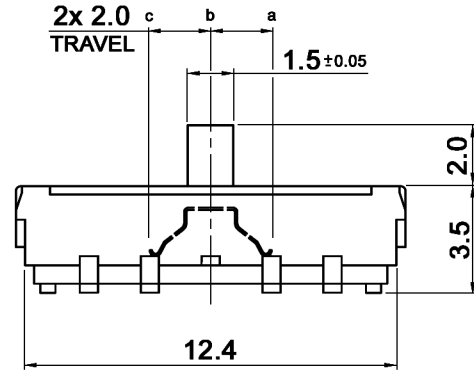

P.C. LAYOUT

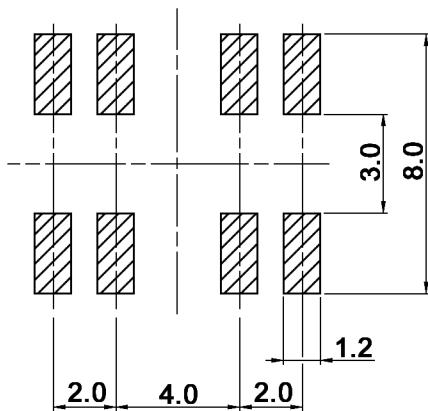

CIRCUIT DIAGRAM
C: COMMON PIN



Compliance: RohS III (2015/863/EU)

Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm above 50-100: ±0.5mm		Date	Name
		09/07	dr
Circuit	05/22	dr	
Operating temperature	07/21	dr	
Slider material	06/21	dr	
Revised	01/21	dr	
Dimension	07/16	dr	
Common pin orientation	10/14	dr	
Material contact plate	07/14	dr	
Soldering conditions	07/11	dr	
Material	06/09	dr	
Slider position	06/08	dr	
Operating temperature	12/07	dr	
Modifications	Date	Name	

MMS 238 T

knitter-switch

30 12 36


Page

1/3

Specifications:

Contact rating: 0.3A, 6V DC
Contact resistance: 70mOhm max.
Insulation resistance: 100MOhm min. at 500V DC for 1 minute
Dielectric strength: 500V AC (50/60Hz, 2mA) for 1 minute
Operating temperature: -40°C to +85°C
Mechanical life: 5 000 cycles min.
Operating force: a-b c-b: 200 +/-100gf
 b-a b-c: 300 +/-150gf
Material: Case: PPA, black
 Contact plate: stainless steel, silver plated
 Slider: PPA, black
 Cover: SUS, washing
 Terminal: brass strip, silver plated


Soldering conditions:

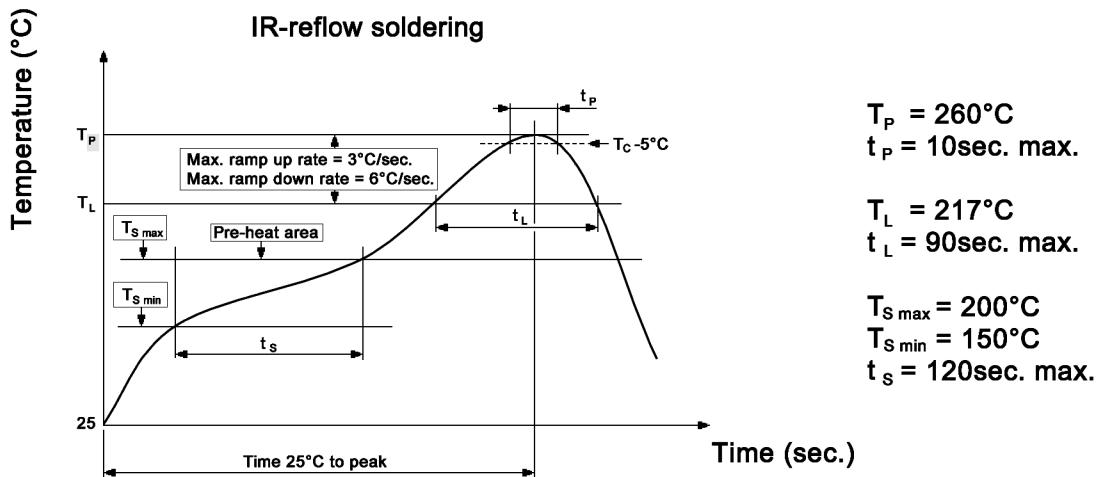

Compliance: RohS III (2015/863/EU)

Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm above 50-100: ±0.5mm		Date	Name	<h1>MMS 238 T</h1>
		09/07	dr	
Circuit	05/22	dr		
Operating temperature	07/21	dr		
Slider material	06/21	dr		
Revised	01/21	dr		
Dimension	07/16	dr		
Common pin orientation	10/14	dr		
Material contact plate	07/14	dr		
Soldering conditions	07/11	dr		
Material	06/09	dr		
Slider position	06/08	dr	<h2>30 12 36</h2>	Page
Operating temperature	12/07	dr		2/3
Modifications	Date	Name		

Packaging:

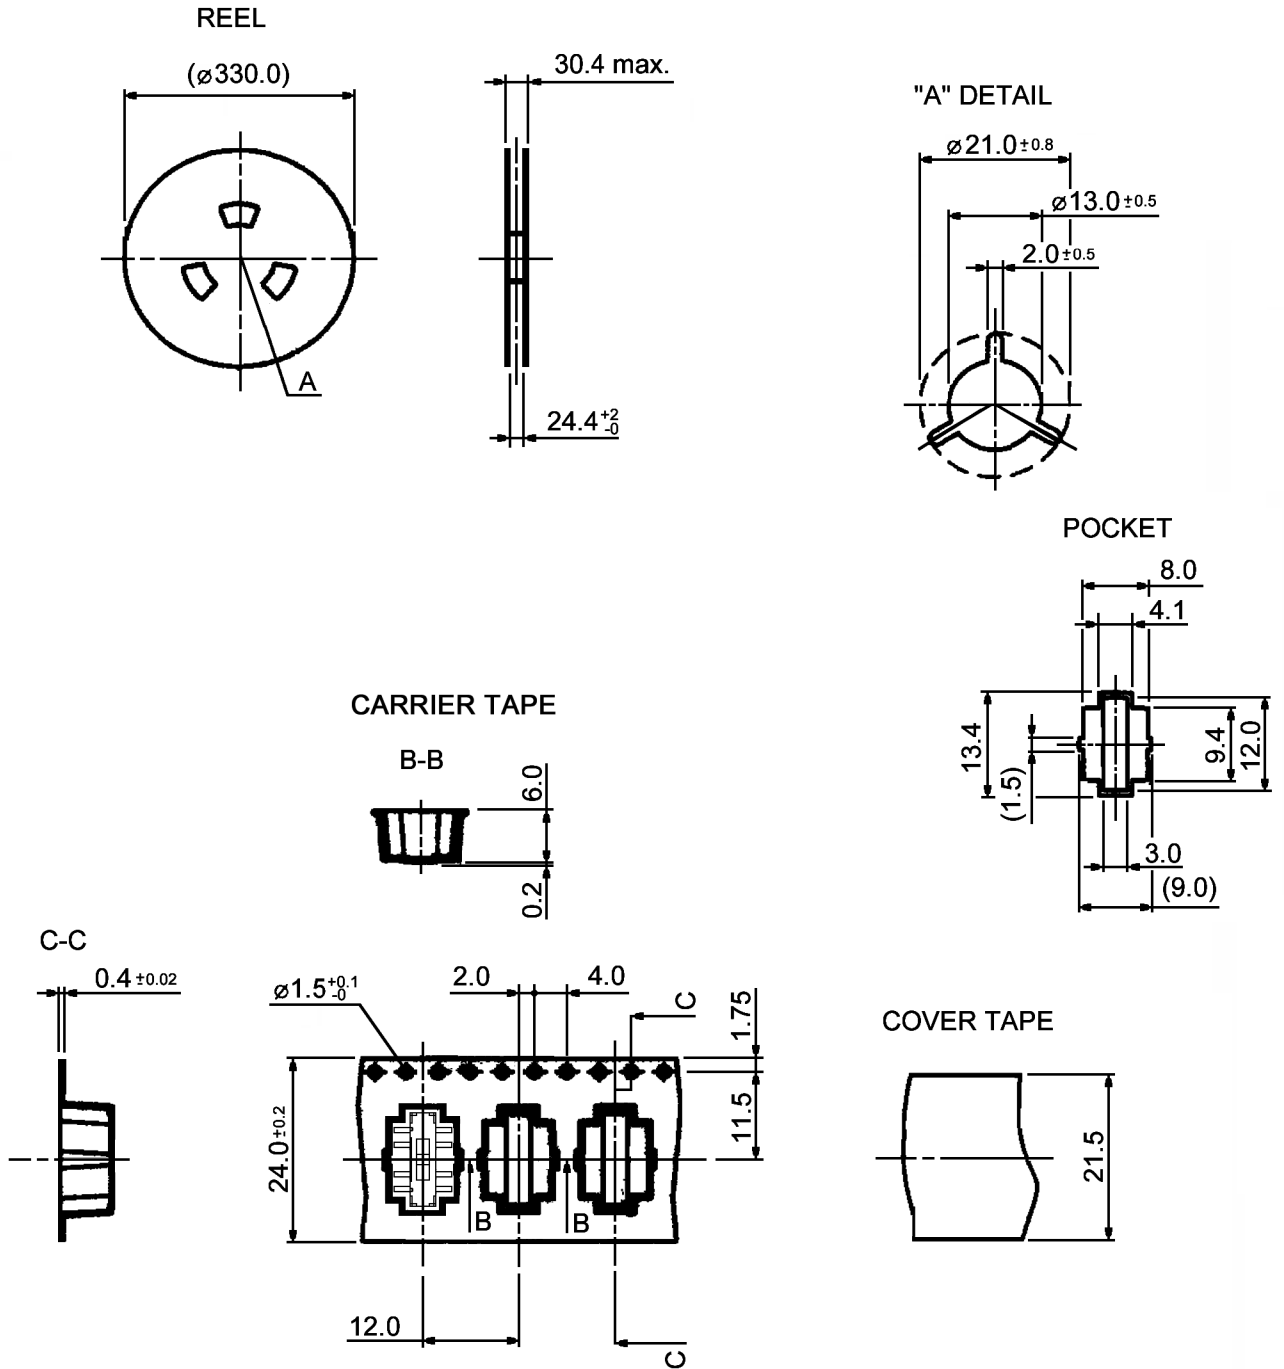

Packaging unit: 900 pcs. / reel
 Compliance: RohS III (2015/863/EU)

Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm above 50-100: ±0.5mm		Date	Name
		09/07	dr
Circuit	05/22	dr	
Operating temperature	07/21	dr	
Slider material	06/21	dr	
Revised	01/21	dr	
Dimension	07/16	dr	
Common pin orientation	10/14	dr	
Material contact plate	07/14	dr	
Soldering conditions	07/11	dr	
Material	06/09	dr	
Slider position	06/08	dr	
Operating temperature	12/07	dr	
Modifications	Date	Name	

MMS 238 T

knitter-switch

30 12 36

Page

3/3