



HOLE LAYOUT $\oplus 0.05$

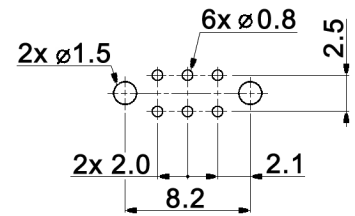

CIRCUIT DIAGRAM
C: COMMON PIN
BOTTOM VIEW



non-shorting

Specifications:

- Contact rating: 0.1A, 12V DC
- Contact resistance: 20mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC for 1 minute
- Dielectric strength: 500V AC (50/60Hz, 2mA) for 1 minute
- Operating temperature: -25°C to +85°C
- Mechanical life: 10 000 cycles
- Operating force: 250 +/-100gf
- Soldering conditions: 260 +/-5°C, 5 +/-1sec.
- Material: Contact clip: phosphor bronze, silver plated
Slider: PA66, black
Spring plate: stainless steel, nickel plated
Terminal: brass strip, silver plated
Base: phenolic resin, natural
Frame: steel, nickel plated

Compliance: RohS II (2011/65/EU)

Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm	Date	Name
	07/13	dr
Slider material	01/15	dr
Modifications	Date	Name

MFP 213 N-RA

30 28 93

Page

1/1

knitter-switch