


ACTUATOR SHOWN IN POS. 1

PANEL MOUNTING

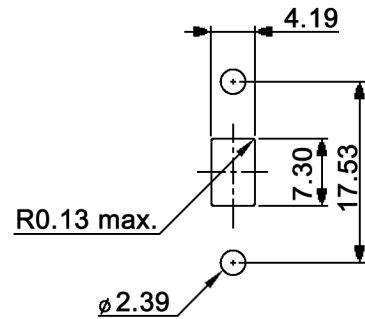

CONTACT ARRANGEMENT:

	function	actuator in position 1	actuator in center	actuator opposite to pos. 1
P	On-Off-On	1-2, 4-5	open	2-3, 5-6

Specifications:

- Contact rating: 5A, 120V AC or 28V DC  
2A, 250V AC
- Contact resistance: 10mOhm max. at 2-4V DC
- Insulation resistance: 1000MOhm min.
- Dielectric strength: 1000V RMS
- Operating temperature: -40°C to +85°C
- Mechanical life: 30 000 make-and-break cycles
- Soldering conditions: wave soldering: 260 +/-5°C, 5 +/-1sec.
- Material: Case: diallyl phthalate (DAP) (UL94V-0)  
Actuator: nylon, black  
Housing: stainless steel  
Contact / terminals: copper, silver plated

Compliance: RohS III (2015/863/EU)

Tolerances:			Date	Name	<h1>MFP 226 P-PC</h1>
			07/04	dr	
Revised	01/24	dr	<h2>knitter-switch</h2>		<h1>30 04 75</h1>
Soldering conditions	08/13	dr			
Modifications	Date	Name			1/1