



P.C. LAYOUT

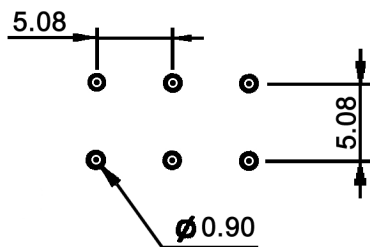

SCHEMATIC



Specifications:

Contact rating: 1A, 250V AC; 3A, 120V AC or 28V DC  
 Contact resistance: 50mOhm max.  
 Insulation resistance: 1 000MOhm min.  
 Dielectric strength: 1 000V RMS  
 Operating temperature: -40°C to +85°C  
 Mechanical life: 20 000 make-and-break cycles  
 Min. load: 100mA, 10V DC  
 Soldering conditions: auto-soldering: 260 +/-5°C, max. 10sec.  
 Material: Case: nylon, white  
 Actuator / housing: nylon, black  
 Terminals / contact: silver plated copper alloy



Tolerances:		Date	Name	<h1>MSS 3122 N</h1>	<h2>30 04 58</h2>	Page
		06/04	us			
Dimensions	11/08	dr				
Specifications	05/08	dr				
Soldering conditions	08/07	dr	<b>knitter-switch</b>	<b>30 04 58</b>	1/1	
Schematic	08/05	dr				
Contact material	11/04	dr				
Modifications	Date	Name				