
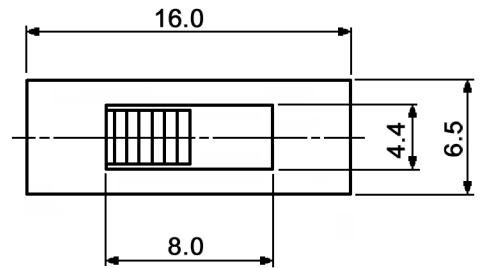



HOLE LAYOUT $\oplus 0.05$

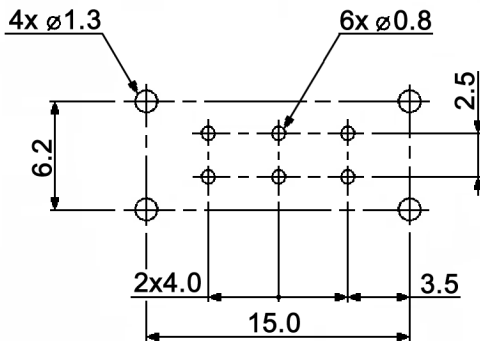

Specifications:

- Contact rating: 0.35A, 30V DC
- Contact resistance: 20mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC for 1 minute
- Dielectric strength: 500V AC for 1 minute (50/60Hz, 2mA)
- Operating temperature: -10°C to +60°C
- Mechanical life: 10 000 cycles min.
- Operating force: 200gf +/-100gf
- Soldering heat resistance: bath method: 260 +/-5°C; 5 +/-1.0sec.
- Contact timing: non - shorting
- Switching function: on - on
- Material: Slider: POM, black
Frame: SPCC, nickel plated
Steel ball: carbon steel, natural
Spring: SWC, temper
Contact clip: C5210R-EH, silver plated
Base: phenolic resin, natural
Terminal: brass strip, silver plated

SCHEMATIC



Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm		Date	Name
		07/05	dr
PCB-layout	10/11	dr	
Packaging	08/08	dr	
Contact rating	06/08	dr	
Specifications	07/07	dr	
Modifications	Date	Name	

MFP 211 N


knitter-switch

30 06 50

Page

1/2

Packaging:

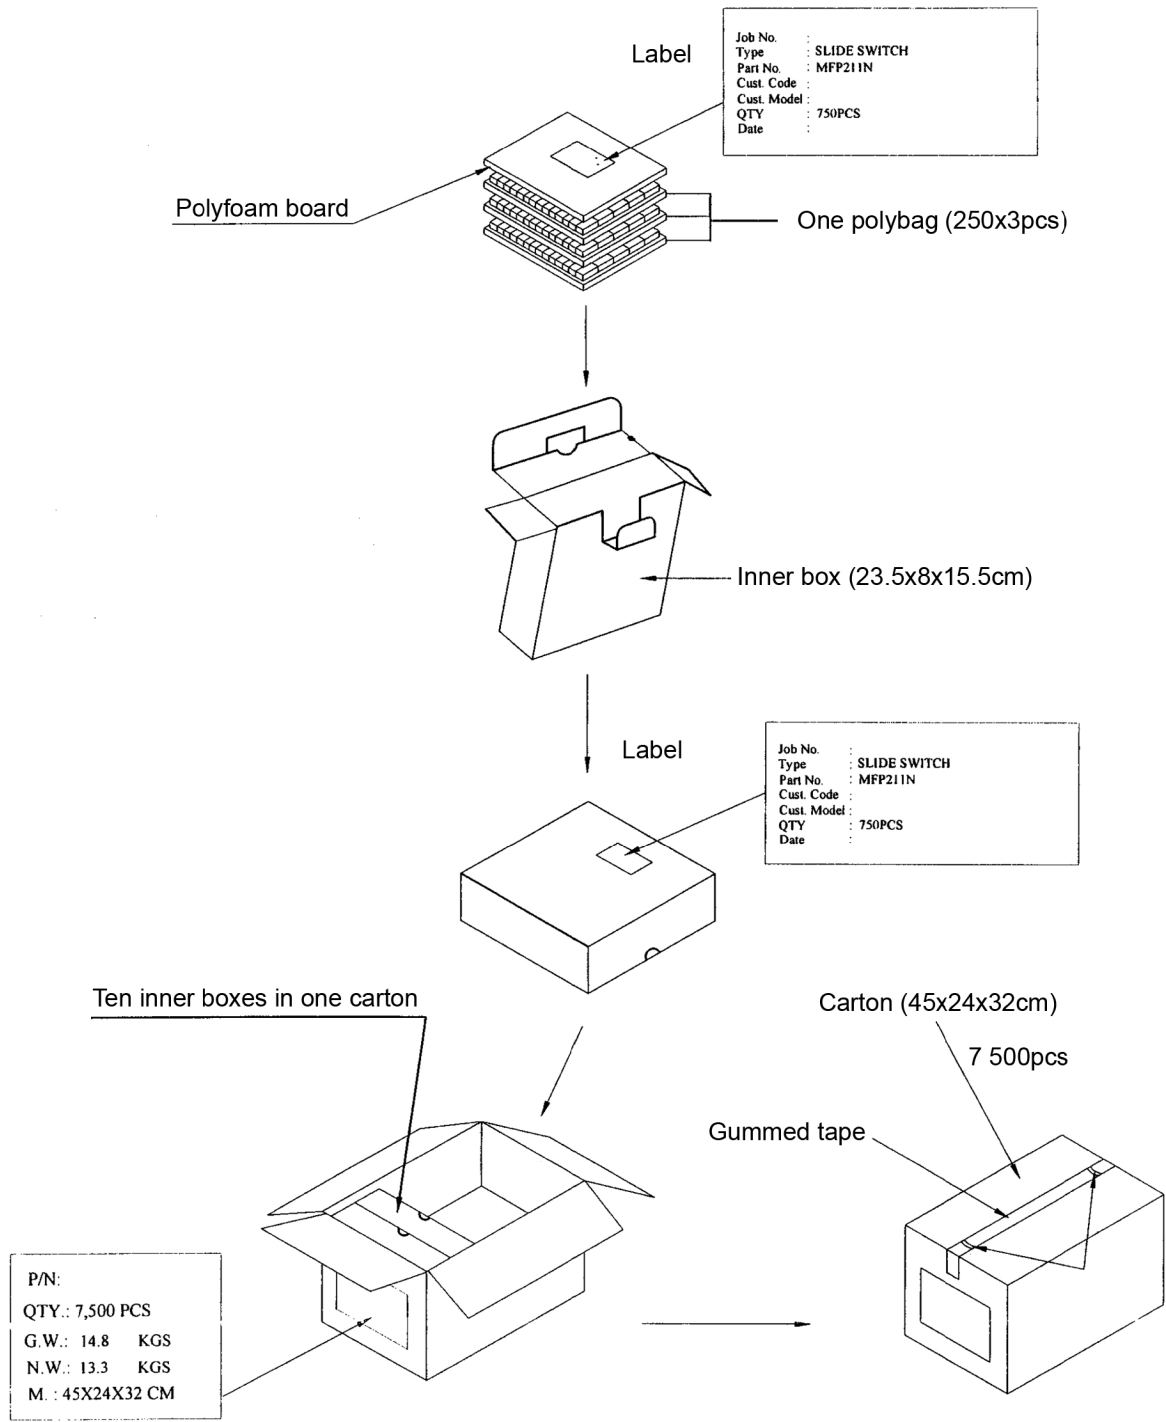

Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm			Date	Name	<h1>MFP 211 N</h1>
			08/08	dr	
			knitter-switch		<h2>30 06 50</h2>
Modifications			Date	Name	Page 2/2