


PANEL MOUNTING

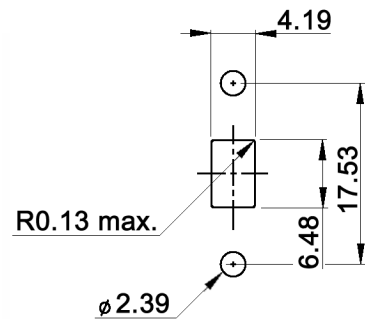

CONTACT ARRANGEMENT

code for x	function	actuator in position 1	actuator opposite to pos. 1
D	On-On	1-2	2-3
F	On-Mom		


SWITCH RATING

code for y	contacts and terminals	rating AC with real load	rating DC with real load
empty	silver-plated	2A/250V, 5A/125V	5A/28V
B	gold-plated	0.4VA/20V	0.4VA/20V
G	gold-plated over silver	2A/250V, 5A/125V	5A/28V

Specifications:

- Contact resistance: 10mOhm max. at 2-4V DC
- Insulation resistance: 1 000MOhm min.
- Dielectric strength: 1 000V RMS
- Operating temperature: -40°C to +85°C
- Mechanical life: 30 000 make-and-break cycles
- Material: Case: diallyl phthalate (DAP), UL9V-0, red
Housing: stainless steel
Actuator: nylon, black
Contact / terminals: copper alloy, surface see table "y"
Terminal seal: epoxy

SOLDER LUG

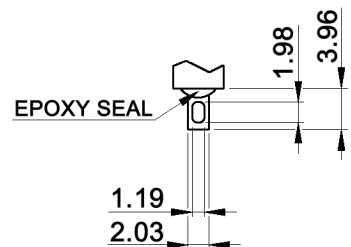

Compliance: RohS III (2015/863/EU)

Tolerances: 0.00: ± 0.25mm 0.0: ± 0.40mm		Date	Name	<h1>MFS 126 xy</h1>
		03/08	dr	
Switch function	01/24	dr		
Operating temperature	10/23	dr		
Plating	03/22	dr		<h1>30 14 24</h1>
Contact arrangement	03/18	dr	knitter-switch	
Switch function	12/17	dr		
Modifications	Date	Name		1/1