



Drawings

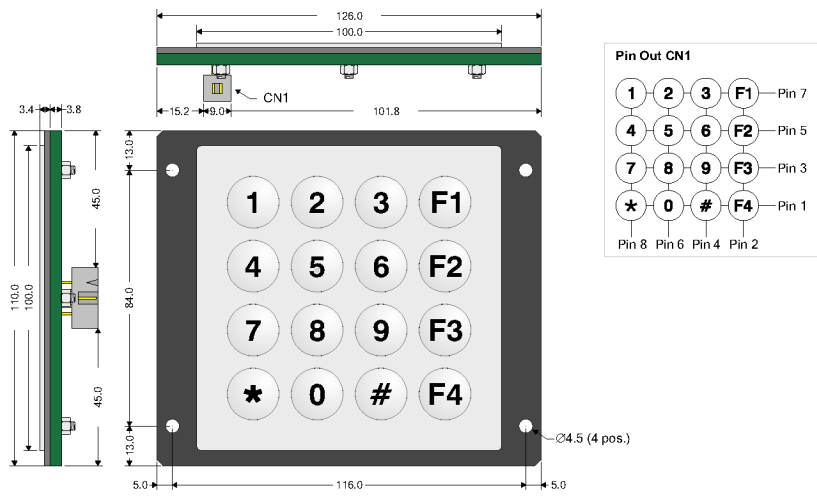

Suggested Cut-out

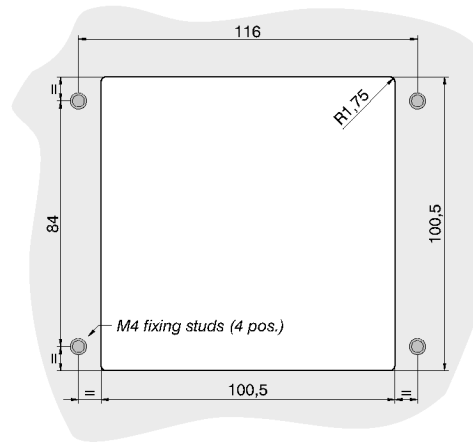

IP	65
IK	08
Cycles	3.000.000
Operating temp.	-10° to +70°C (0° to +50°C with TI)
Storage temp.	-25° to +85°C (-25° to +55°C with TI)

<b>Marking</b>	
Chemical engraving + color filling	



<b>Tolerances:</b>			<b>Date</b>	<b>Name</b>	<h1>YME IP 16 N</h1>
			05/12	dr	
<b>IP rating</b>	05/19	dr	<h2>knitter-switch</h2>		<h1>30 26 42</h1>
<b>Rename</b>	02/14	dr			
<b>Rename</b>	11/13	dr			
<b>Modifications</b>	<b>Date</b>	<b>Name</b>			Page 1/1