



Specifications:

Contact rating:	12 V DC, 50 mA / 1 V DC, 0.5 mA
Contact resistance:	< 100 mΩ
Insulation resistance:	> 2 GΩ at 100 V DC
Dielectric strength:	250 V, 50 Hz for the duration of 1 minute
Operating temperature:	-40 °C to +85 °C
Electrical life:	minimum 250 000 cycles
Operating force:	2.16 N ± 0.59 N
Contacts:	metal contact, stainless steel, silver-plated
Terminals:	phosphor bronze, silver-plated
Material:	case: PA9T button: PA9T frame: phosphor bronze, tin-plated
Mounting:	on pc-board – SMD
Travel:	0.15 mm ± 0.05 mm

Model:

TSS 4-RA

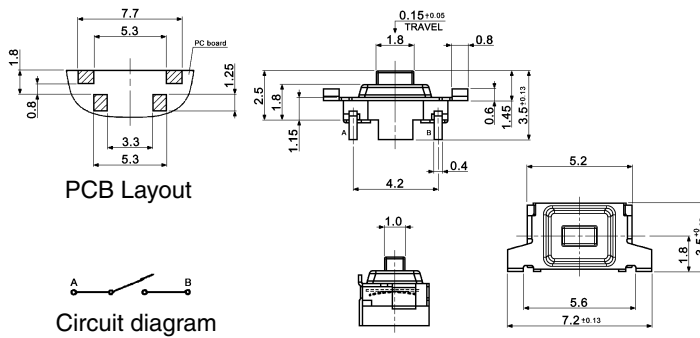

Packing: 2000 pcs/reel

