




CIRCUIT DIAGRAM



Switching function: off - mom



DRILLING PLAN

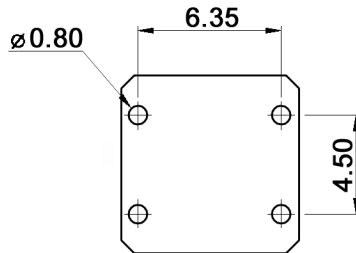

Specifications:

Contact rating: 100mA, 42V AC/DC
 Contact resistance: 100mOhm max.
 Insulation resistance: 100MOhm min. at 100V DC
 Dielectric strength: 250V DC, 50Hz for the duration of 1 minute
 Operating temperature: -40°C to +80°C
 Mechanical life: 5 000 000 cycles
 Soldering conditions: wave-soldering: 260°C max., 10sec. max.
 IP rating: IP67
 Material: Button: silicone
 Base: thermoplastic, UL94V-0, blue
 Contact disc: stainless steel, gold plated over nickel barrier
 Terminal contact: brass, 0.025µ gold plated
 Terminal: brass, tin plated

xxx	Operating force (N)	Button color
250	2.5 +/-0.5	natural
350	3.5 +/-0.6	natural
650	6.5 +/-1.3	white

Compliance: RohS III (2015/863/EU)

Tolerances:			Date	Name	TSE 808-xxx-1
			09/20	dr	
			knitter-switch		30 44 88
Button color	01/21	dr			
Modifications	Date	Name			1/1