


Long Travel Tact switch for SMT




Specifications:

Contact rating:	12 V DC, 50 mA,
Contact resistance:	< 100 mΩ
Insulation resistance:	> 100 MΩ
Dielectric strength:	300 V, 50 Hz for the duration of 1 minute
Operating temperature:	-40 °C to +85 °C
Mechanical life:	minimum 100 000 cycles
Operating force:	R: 200 gf ± 50 gf S: 350 gf ± 100 gf
Contacts:	gold-plated
Terminals:	silver-plated
Material:	case and actuator: Nylon meets UL 94V-0
Mounting:	on pc-board – SMD
Travel:	1.3 mm + 0.1/-0.3 mm
Packing:	900 pieces/reel

Models:

TSS 650 □-J

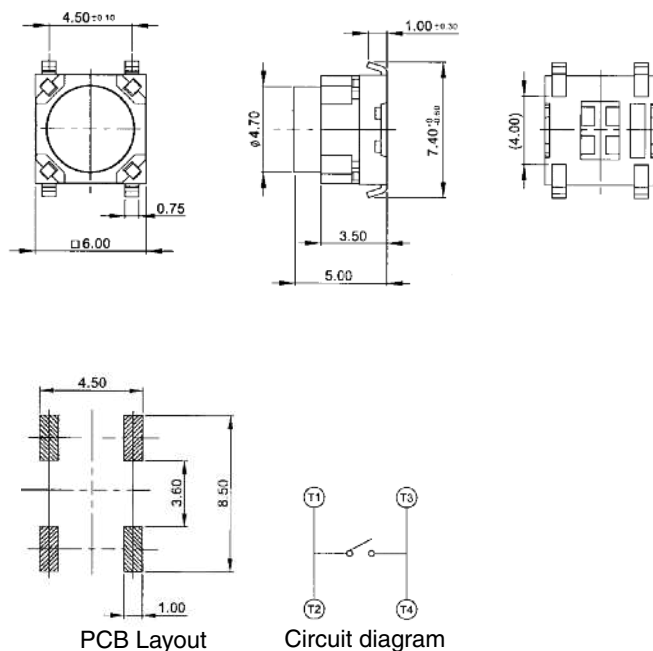

Ordering code: TSS 650 □-J

Operating force:

R	2.0 N
S	3.5 N