


Specifications:


Contact rating:	12 V DC, 50 mA
Contact resistance:	< 100 mΩ
Insulation resistance:	> 100 MΩ
Dielectric strength:	250 V AC (50 Hz or 60 Hz) for 1 minute
Operating temperature:	-40 °C to +85 °C
Operating force:	see ordering code
Mechanical life:	minimum 500 000 cycles
Material:	cover: nickel, silver-plated case: high-temp. PA 9T UL 94 V-0, black stem: silicone
Contacts:	phosphor bronze, silver-plated
Terminals:	brass, silver-plated
Protection:	IP 57
Packing:	on tapes – see ordering code

Models:

TSSE 6 -RA

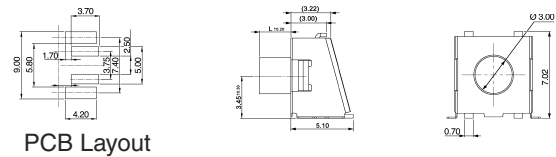


PCB Layout

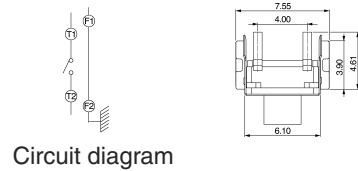


Circuit diagram

TSSE 6 -RA-1

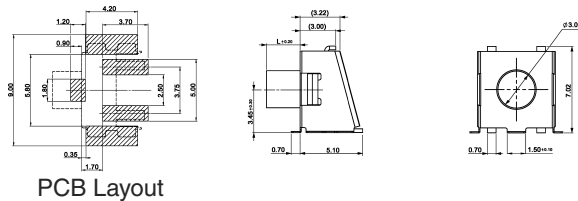

PCB Layout

washable

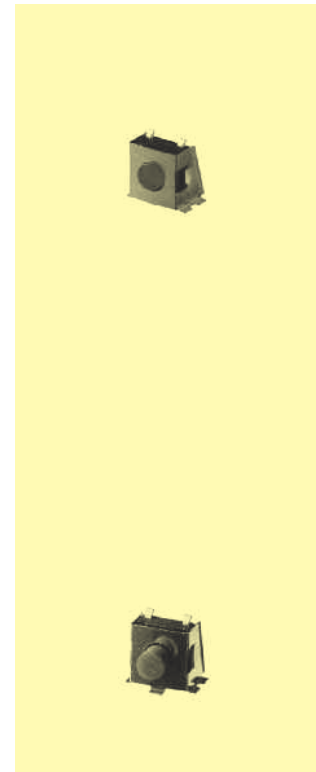

Ordering code:

TSSE 6 -RA

Actuator height (L):

<input type="checkbox"/> 00	0 mm	700 pcs / reel
<input type="checkbox"/> 08	0.8 mm	700 pcs / reel
<input type="checkbox"/> 10	1.0 mm	700 pcs / reel
<input type="checkbox"/> 23	2.35 mm	700 pcs / reel
<input type="checkbox"/> 33	3.3 mm	500 pcs / reel

Operating force:

<input type="checkbox"/> N	1.8 N (brown)
<input type="checkbox"/> R	2.6 N (red)
<input type="checkbox"/> NK	1.8 N (black)
<input type="checkbox"/> RK	2.6 N (black)

No support terminals

-1 With support terminals