


CONTACT ARRANGEMENT

| code for x | function | toggle towards keyway | toggle opposite to keyway |
|------------|----------|-----------------------|---------------------------|
| D | On-On | 1-2, 4-5, 7-8 | 2-3, 5-6, 8-9 |
| F | Mom-On | | |

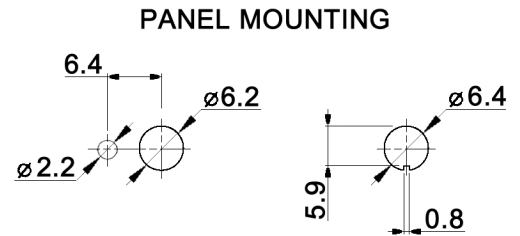

| code for x | function | toggle towards keyway | toggle in center | toggle opposite to keyway |
|------------|-------------|-----------------------|------------------|---------------------------|
| E | On-Off-On | | | |
| G | Mom-Off-Mom | 1-2, 4-5, 7-8 | open | 2-3, 5-6, 8-9 |
| H | Mom-Off-On | | | |
| EA | On-On-On | 1-2, 4-5, 7-8 | 2-3, 4-5, 8-9 | 2-3, 5-6, 8-9 |

Specifications:

- Contact rating:** 3A, 250V AC / 6A, 125V AC
4A, 30V DC / 5A, 12V DC
6A, 6V DC
- Contact resistance:** 20mOhm max.
- Insulation resistance:** 1 000MOhm min. at 500V DC
- Dielectric strength:** 1 500V, 50Hz for the duration of 1 minute
- Operating temperature:** -45°C to +140°C
- Mechanical life:** min. 200 000 cycles
- Soldering conditions:** hand-soldering: max.: 420°C, 3sec., 60W
auto-soldering: max.: 270°C, 5sec.
- Mounting instruction:** max. torque: 49Ncm
- Material:** Contact portion: solid silver
Other conducting parts: brass, 10µm silver plated over 1.5µm nickel
Case: DAP
Housing: stainless steel, CNS9265
Bushing: copper alloy, C3604BD nickel plated
Actuator: copper alloy, C3604BD chrome plated
- Included accessories:** 2 pcs. nut M6x0.75, nickel plated, 9mm wrench size
1 pc. tooth washer
1 pc. locking washer



| | | |
|---|-------|------|
| Tolerances: 0.00: ±0.25mm 0.0: ±0.40mm | Date | Name |
| | 04/09 | dr |
| | | |
| | | |
| Material | 07/11 | dr |
| Dimension | 01/11 | dr |
| Panel mounting | 05/10 | dr |
| Modifications | Date | Name |

MTA 306 x

30 17 89

knitter-switch

Page

1/1