




**PANEL MOUNTING**

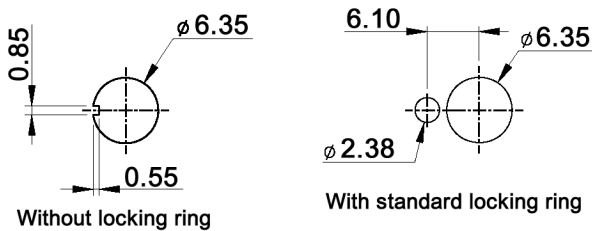

**SOLDER LUG**



**HARDWARE**

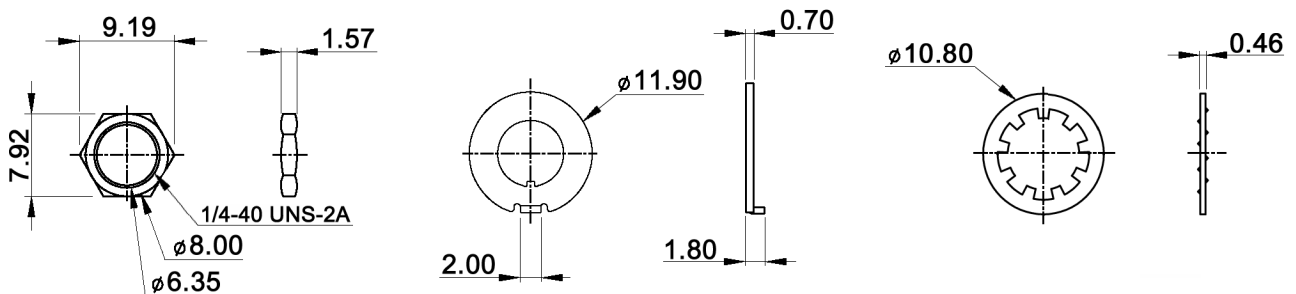

**SWITCH FUNCTION**

Model No.	POS. 1	POS. 2
MZME 1 DB	ON	ON
Term. Conn.	2-3	2-1

**Specifications:**

Contact rating: 0.4VA max.; 20V max. (AC or DC)  
 Contact resistance: 10mOhm max. at 2-4V DC  
 Insulation resistance: 1 000MOhm min.  
 Dielectric strength: 1 000V RMS  
 Operating temperature: -40°C to +85°C  
 Mechanical life: 30 000 make-and-break cycles  
 ESD resistance: 10kV between actuator and terminals  
 UL certified  
 Material: Case / bushing: glass filled nylon 66, flame retardant, heat stabilized (UL94V-0), color black with a white print  
 Actuator: glass filled nylon 6/6  
 Contact / terminal: copper alloy, gold plated

**Compliance: RohS III (2015/863/EU)**

Tolerances: 0.00: ±0.25mm 0.0: ±0.40mm	Date	Name
	03/08	dr
Accessory	07/21	dr
Panel mounting	07/08	dr
Modifications	Date	Name

**MZME 1 DB-ESD**

**30 14 15**

Page

1/1