




PANEL MOUNTING

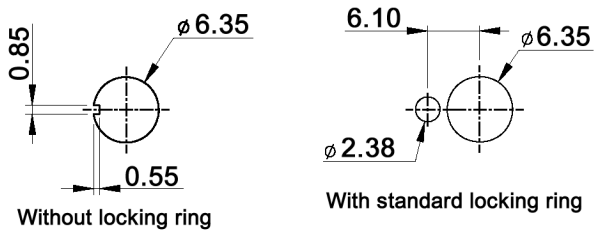

P.C. MOUNTING



HARDWARE

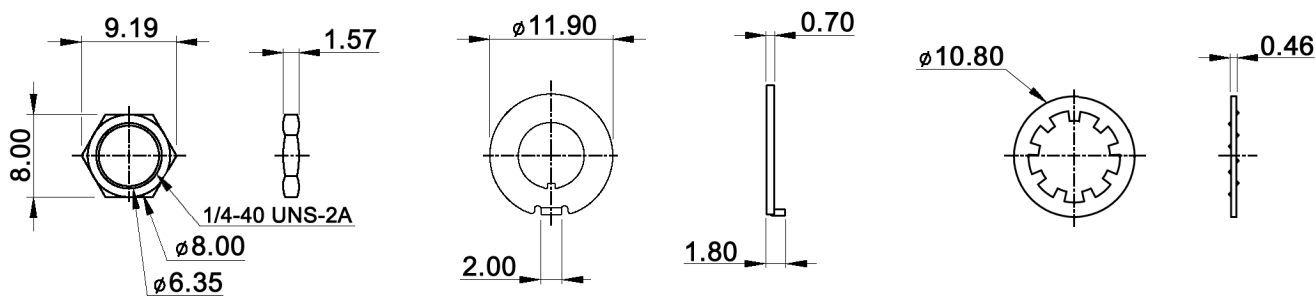

SWITCH FUNCTION

Model No.	POS. 1	POS. 2
MZME 1 DB	ON	ON
Term. Conn.	2-3	2-1

Specifications:

Contact rating: 0.4VA max.; 20V max. (AC or DC)
 Contact resistance: 10mOhm max. at 2-4V DC
 Insulation resistance: 1 000MOhm min.
 Dielectric strength: 1 000V RMS
 Operating temperature: -40°C to +85°C
 Mechanical life: 30 000 make-and-break cycles
 ESD resistance: 10kV between actuator and terminals
 UL certified
 Material: Case / bushing: glass filled nylon 66, flame retardant, heat stabilized (UL94V-0), color black with a white print
 Actuator: glass filled nylon 6/6
 Contact / terminal: copper alloy, gold plated

Compliance: RohS III (2015/863/EU)

Tolerances: 0.00: ±0.25mm 0.0: ±0.40mm	Date	Name
	03/08	dr
Temperature	07/21	dr
Panel mounting	07/08	dr
Modifications	Date	Name

MZME 1 DB-PC-ESD

knitter-switch

30 14 14

Page

1/1