

TOGGLE SHOWN IN POS. 2

Contact arrangement


code for x	function	toggle towards keyway	toggle opposite to keyway
N	On-On	1-2, 4-5	2-3, 5-6
R	Mom-On		

code for x	function	toggle towards keyway	toggle in center	toggle opposite to keyway
P	On-Off-On	1-2, 4-5	open	2-3, 5-6
S	Mom-Off-Mom			
T	Mom-Off-On			

Specifications:

- Contact rating: 6A, 125V AC; 3A, 250V AC
- Contact resistance: 20mOhm max. (1.5mA, 200µV AC; 1kHz)
- Insulation resistance: 1 000MOhm min. at 500V DC
- Dielectric strength: 1 000V AC (between terminals)
1 500V AC (between terminals and ground) for 1 minute
- Operating temperature: -20°C to +80°C
- Mechanical life: 100 000 cycles min.
- Electrical life: 25 000 cycles min.
- Operating force: 2.5 +/-1.2 N (250 +/-120 gf)
- Material: Case: diallyl phthalate resin, black
Fixed terminal: brass, silver plated
Common terminal: brass, silver plated
Plunger: brass, chrome plated
Bushing: brass, nickel plated
Frame: stainless steel
Plate: brass, tin plated
Contact: silver, silver plated

P.C.B. LAYOUT

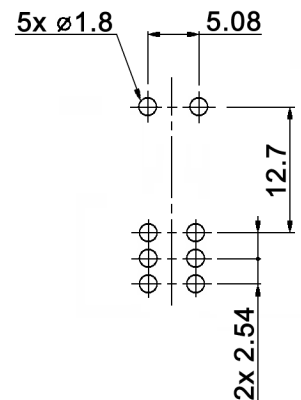

Compliance: RohS III (2015/863/EU)

Tolerances: ±0.15mm	Date	Name	<h1>STM 206 x-VM</h1>
	09/21	dr	
			<h2>30 46 95</h2>
			Page
			1/1
Modifications	Date	Name	

knitter-switch