

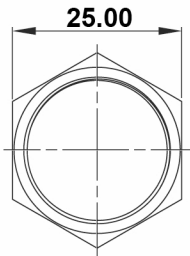


HARDWARE:


HEX NUT



O-RING



PANEL CUT-OUT

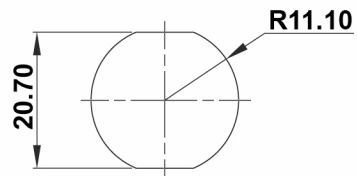

MAX. PANEL THICKNESS: 10.0 mm

y	Wire length
(empty)	300 mm
-150	150 mm

Specifications:

Contact rating: 1 A, 5-24 V AC/DC (pulse mode)
 Contact resistance: 1 Ohm max.
 Pulse duration: 200ms min.
 Operating temperature: -20°C to +65°C
 Mechanical life: 50 000 000 cycles min.
 Material: Bushing: see table "x"
 Sealing: silicone, epoxy
 O-ring: silicone
 Hex nut: brass, nickel plated

x	Bushing material
AN	aluminum, natural
AB	aluminum, black anodized
D0	SUS 304
D3	SUS 316

Compliance: RohS III (2015/863/EU)

Tolerances:	Date	Name
0.00: ±0.25 mm 0.0: ±0.40 mm	01/19	dr
Revised	09/21	dr
Pulse	02/19	dr
Modifications	Date	Name

PBP 22 xMy

30 41 99

knitter-switch

Page

1/1