
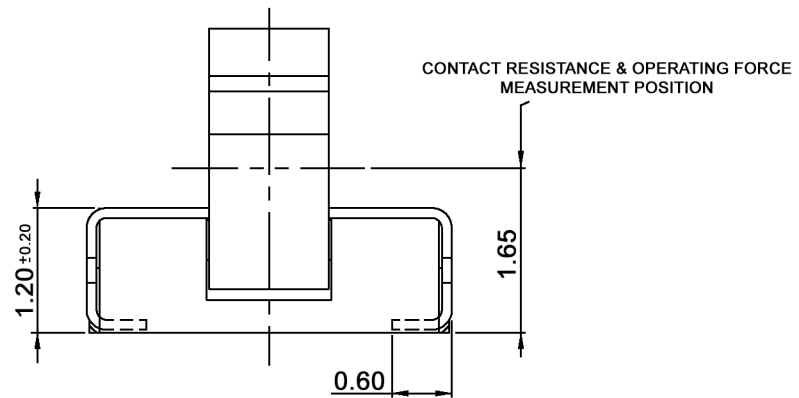
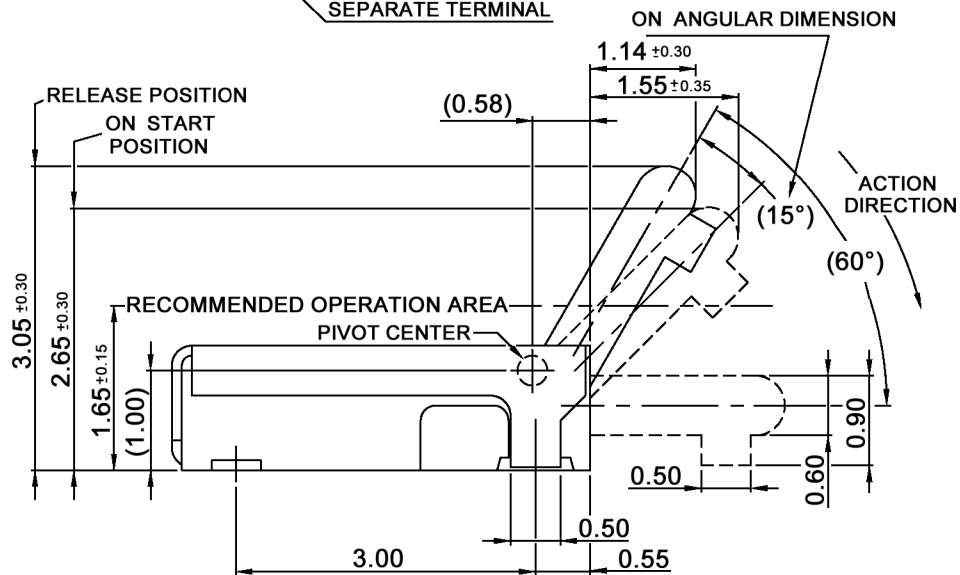


CIRCUIT DIAGRAM



Compliance: RohS II (2011/65/EU)

Tolerances: max. ±0.20mm			Date	Name
			05/18	dr
Modifications	Date	Name		

DTS 205 CJ-T

knitter-switch

30 40 74


Page

1/2

Specifications:

Contact rating: 50µA, 3V DC to 10mA, 5V DC
Contact resistance: 10hm max.
Insulation resistance: 100MOhm min. at 100V DC for 1 minute +/-5sec.
Dielectric strength: 100V AC (50Hz or 60Hz) for 1 minute
Operating temperature: -40°C to +85°C
Storage temperature: -40°C to +85°C
Operating force: 40gf max.
Mechanical life: 50 000 cycles min.
Stop strength: 1kg for 60sec.
Material: Cover: nickel silver
 Stem / base: high-temp. thermoplastic nylon UL94V-0, molded black
 Contact: copper alloy, gold plated
 Terminal: brass, silver plated
 Silicone: silicone, molded black

Soldering conditions:

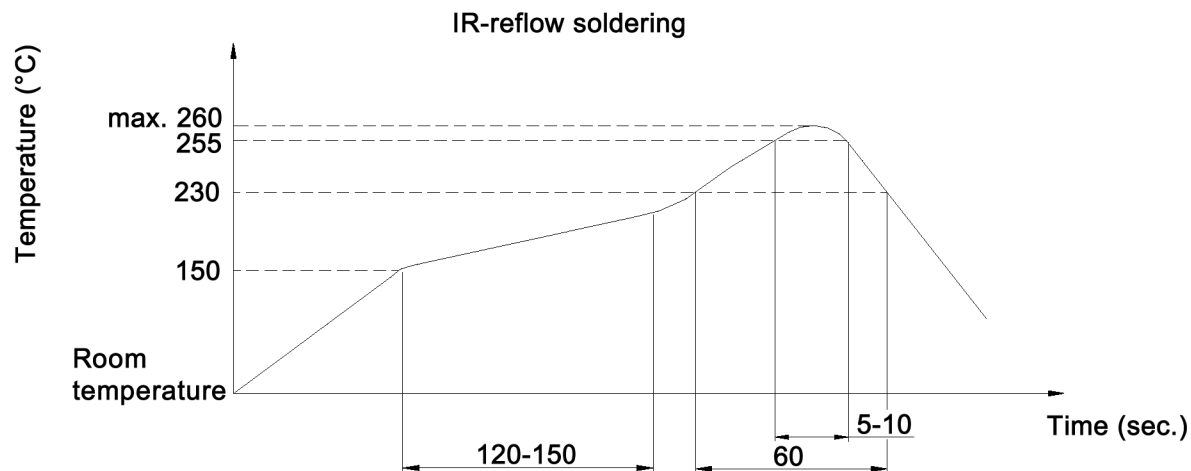

Compliance: RohS II (2011/65/EU)

Tolerances: max. ±0.20mm		Date	Name	DTS 205 CJ-T
		05/18	dr	
			knitter-switch	30 40 74
Modifications		Date	Name	Page 2/2