



**CIRCUIT DIAGRAM**

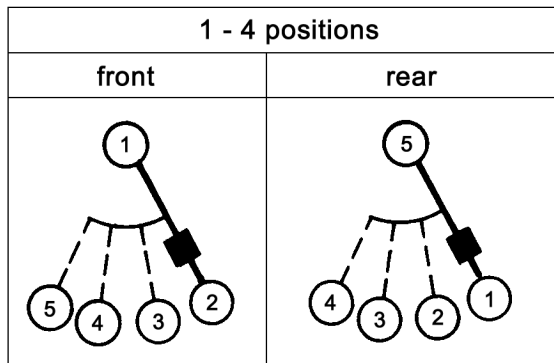

**P.C. LAYOUT**

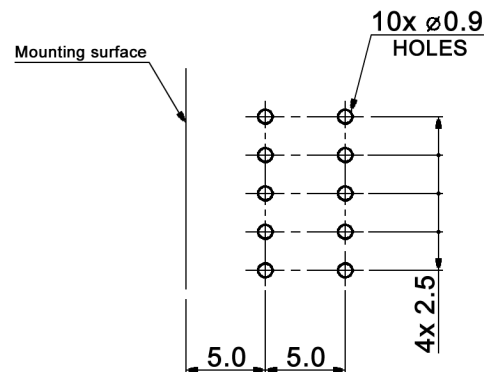

**Specifications:**

- Contact rating: 0.3A max., 16V DC
- Contact resistance: 50mOhm max.
- Insulation resistance: 100MOhm min. at 250V DC
- Dielectric strength: 500V AC for 1 minute
- Operating temperature: -25°C to +70°C
- Mechanical life: 10 000 cycles
- Operating force: 500 +/-200gf.cm
- Soldering conditions: 230 +/-5°C, 3 +/-0.5sec.
- Mounting torque: 0.55Nm max.
- Timing: shorting
- Accessory list: 1 washer, 1 nut
- Packaging: box content: 1200 pcs., box dimension: 260 x 360 x 420 mm, box weight: 10kg

Compliance: RohS II (2011/65/EU)

Tolerances: under to 10: ±0.30mm over 10 to 100: ±0.50mm	Date	Name
	01/12	dr
Mounting torque	08/14	dr
Specifications	07/13	dr
Modifications	Date	Name

**MRS 10H-14S-F20**

**30 25 22**

**knitter-switch**

Page

1/1