

Microminiature Rotary Switches for SMT



Specifications:



Contact rating:	12 V DC, 50 mA switching 60 V DC, 100 mA non-switching
Contact resistance:	< 100 mΩ
Insulation resistance:	> 500 MΩ
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	-30 °C to +85 °C
Mechanical life:	minimum 800 operations
Contacts:	gold-plated over nickel barrier
Terminals:	gold-plated over nickel barrier
Material:	case: LCP, washable frame: stainless steel
Mounting:	on pc-board – SMD
Soldering conditions:	reflow-soldering – max.: 10 sec ±1 sec, 260 °C ± 10 °C

Models: Switching functions

washable

SMR 1–30

on – on

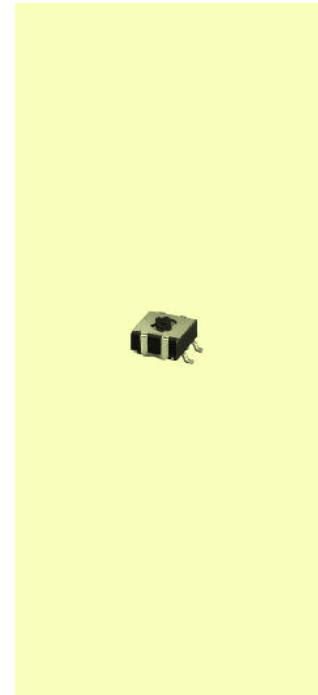

Packing: on tapes: 2000 pieces; reel Ø 330 mm

