



Drawings

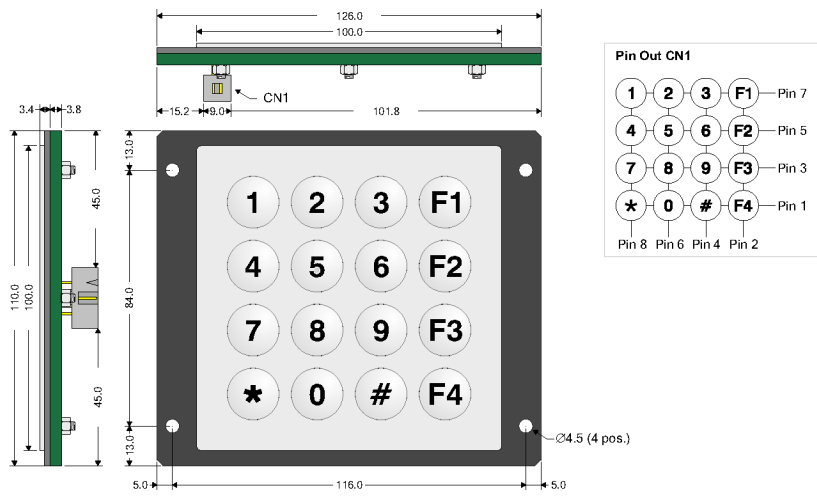

Suggested Cut-out

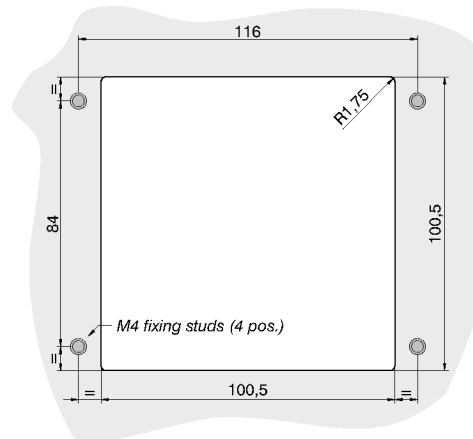

IP	65
IK	08
Cycles	3.000.000
Operating temp.	-10° to +70°C (0° to +50°C with TI)
Storage temp.	-25° to +85°C (-25° to +55°C with TI)

Marking	
Chemical engraving + color filling	



Tolerances:			Date	Name	<h1>YME IP 16 N</h1>
			05/12	dr	
IP rating	05/19	dr	<h2>knitter-switch</h2>		<h1>30 26 42</h1>
Rename	02/14	dr			
Rename	11/13	dr			
Modifications	Date	Name			Page 1/1