

# Detector Switches

## Specifications:


Contact rating:	5V DC, 100 mA
Contact resistance:	< 0.5 Ω
Insulation resistance:	> 100 MΩ
Dielectric strength:	250 V, 50 Hz for the duration of 1 minute
Operating temperature:	-15 °C to +70 °C
Operating force:	< 0.35 N
Mechanical life:	minimum 80 000 operations
Material:	Contacts: stainless steel, silver-plated Terminals: phosphor bronze, silver-plated Case and actuator: HTN, black

## Models:

### Switching functions

DTS 204 C P-T


off – mom

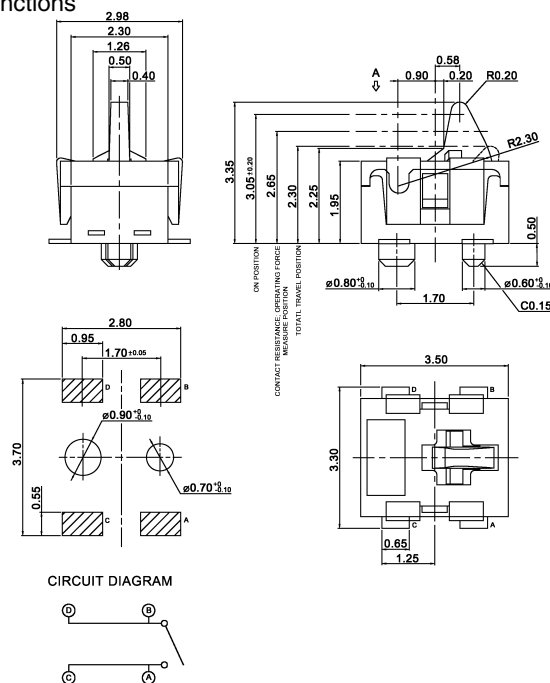

DTS 204 C-T

off – mom

as above, but without posts

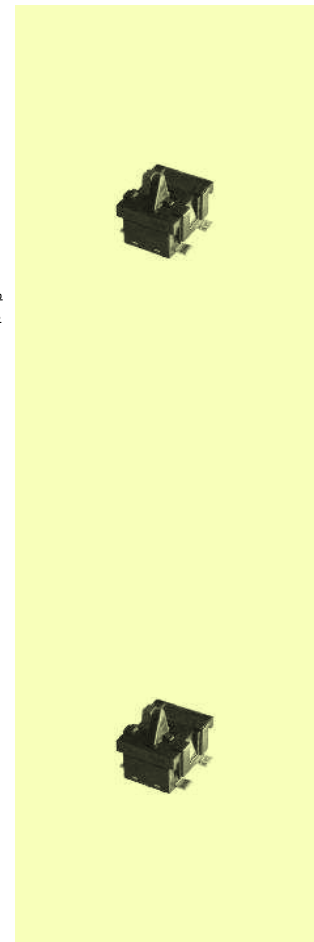

Packing: 1800 pcs/reel