


# Detector Switches




## Specifications:

Contact rating:	5V DC, 1 mA
Contact resistance:	< 2 Ω
Insulation resistance:	> 100 MΩ
Dielectric strength:	100 V, 50 Hz for the duration of 1 minute
Operating temperature:	-10 °C to +60 °C
Operating force:	< 0.35 N
Mechanical life:	minimum 50 000 operations
Material:	Contacts: stainless steel, silver-plated Terminals: phosphor bronze, silver-plated Case and actuator: LCP, black Cover: Nickel-silver

## Models: Switching functions

DTS 209 BPR-T on – (mom)

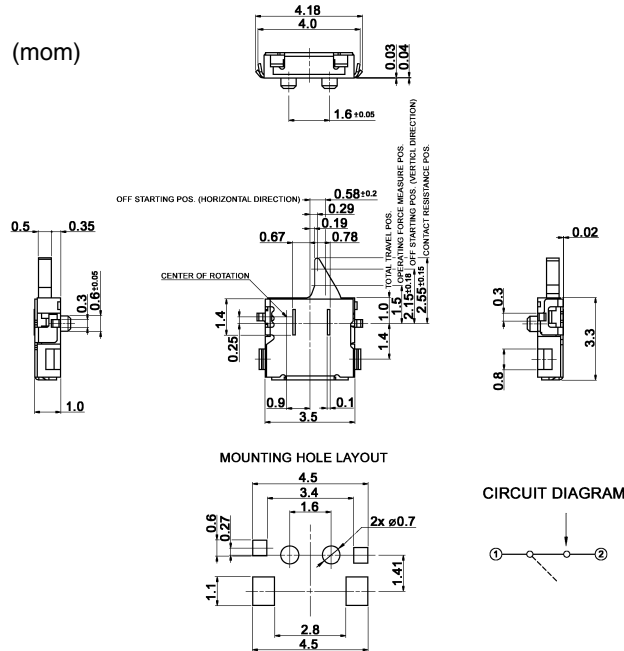

DTS 209 BR-T on – (mom) Data sheet as above, but without posts

DTS 209 CPR-T off – mom Data sheet as above

DTS 209 CR-T off – mom Data sheet as above, but without posts

Packing: 3300 pcs/reel