

# Subminiature Toggle Switches ESD proof, waterproof



## Specifications:


Contact rating:	max. 20 V AC /DC, 0.4 VA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 1000 MΩ
Dielectric strength:	1000 V, 50 Hz for the duration of 1 minute
Operating temperature:	-30 °C to +85 °C
Mechanical life:	minimum 30 000 operations
Contacts/Terminals:	copper alloy
Material:	case: nylon with glass fibre, meets UL 94 V-0, washable support: brass, tin-plated lever: brass, chromium-plated (...-ESD: PA, ESD resistance 6 kV)
Protection:	IP 67
Mounting:	on pc-board

**Models:** Switching functions: the closed contacts are opposite to the lever position.

washable

## SPDT

TST 1 D (-ESD)	on	on
TST 1 E (-ESD)	on	off on
TST 1 F (-ESD)	on	- mom
TST 1 G (-ESD)	mom	off mom
TST 1 H (-ESD)	on	off mom

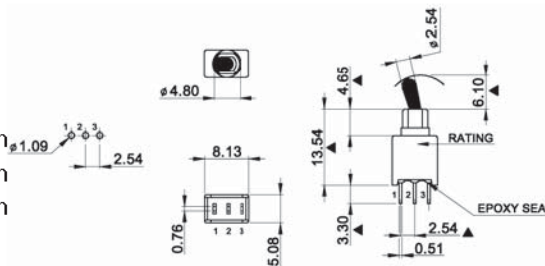

## DPDT

TST 2 N (-ESD)	on	- on
TST 2 R (-ESD)	on	- mom
TST 2 P (-ESD)	on	off on
TST 2 S (-ESD)	mom	off mom
TST 2 T (-ESD)	on	off mom
TST 2 PA (-ESD)	on	on on

