

**Specifications:**

Contact rating:	max. 28 V DC, 0.4 VA min. 20 mV DC, 1 $\mu$ A
Contact resistance:	< 100 m $\Omega$
Insulation resistance:	> 500 M $\Omega$ at 250 V DC
Dielectric strength:	250 V, 50 Hz for the duration of 1 minute
Operating temperature:	-40 °C to +85 °C
Mechanical life:	minimum 30 000 operations
Contacts:	phosphor bronze, gold-plated
Terminals:	PC terminals, crimped, phosphor bronze, gold-plated
Material:	case and lever: PES, meets UL 94 V-0, washable
Mounting:	on pc-board
Soldering conditions:	wave-soldering – max.: 7 sec, 250 °C $\pm$ 5 °C – max.: 5 sec, 270 °C $\pm$ 5 °C
ESD resistance:	> 8 kV (between lever and terminals)



# Microminiature Toggle Switches ESD proof


2

**Models:** Switching functions: the closed contacts are opposite to the lever position;  
 Switching functions F/H: when looking at the brand name on the left hand side.

washable


## SPDT

FT 1 D	on	-	on
FT 1 E	on	off	on
FT 1 F	mom	-	on
FT 1 G	mom	off	mom
FT 1 H	mom	off	on

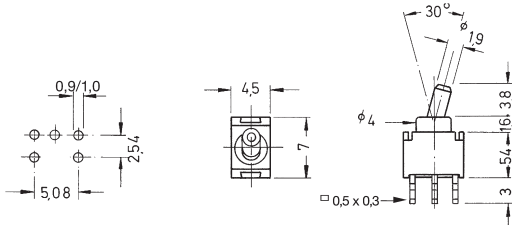


## DPDT

FT 2 D	on	-	on
FT 2 E	on	off	on
FT 2 F	mom	-	on
FT 2 G	mom	off	mom
FT 2 H	mom	off	on

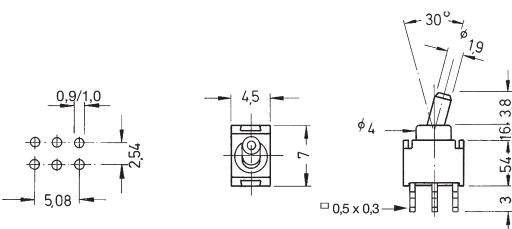

## SPDT

FT 1 D-VM	on	-	on
FT 1 E-VM	on	off	on
FT 1 F-VM	mom	-	on
FT 1 G-VM	mom	off	mom
FT 1 H-VM	mom	off	on

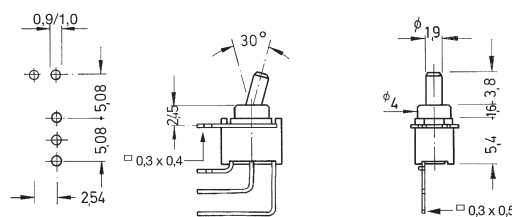

## DPDT

FT 2 D-VM	on	-	on
FT 2 E-VM	on	off	on
FT 2 F-VM	mom	-	on
FT 2 G-VM	mom	off	mom
FT 2 H-VM	mom	off	on

