


Microminiature Pushbutton Switches for SMT







Specifications:

Contact rating:	50 V DC, 10 mA
Contact resistance:	< 100 mΩ
Insulation resistance:	>1000 MΩ
Dielectric strength:	100V, 50 Hz for the duration of 1 minute
Operating temperature:	-10 °C to +60 °C
Operating force:	1.1 ± 0.8 N
Mechanical life:	minimum 100 000 operations
Material:	Contacts, Terminals: phosphor-bronze, gold-plated Stem: brass, nickel-plated Case: HTN, black Cover: stainless steel
Travel:	0.65 ± 0.45 mm


Models: Switching function

SSP 129 T


off – mom

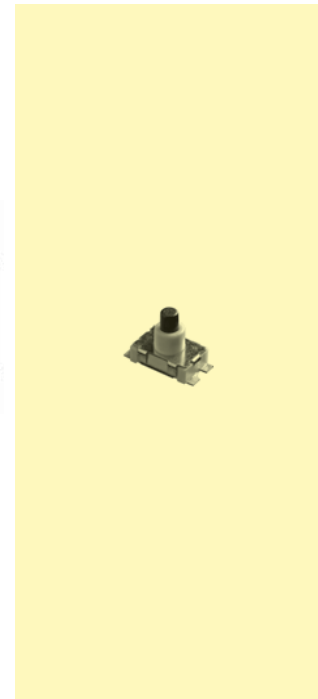

PCB Layout



Circuit diagram



Packing:
1000 pcs/reel

