

Illuminated Pushbutton Switches waterproof



Specifications:


Contact rating:	30 V DC, 100 mA
Contact resistance:	< 50 mΩ
Insulation resistance:	> 100 MΩ
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	-40 °C to +85 °C
Operating force:	2.5 N ± 1 N
Mechanical life:	minimum 50 000 operations
Material:	Surface of contacts, terminals: gold over nickel plated Case: PA 66 Cap: PC
Mounting:	snap-in, mounting-hole diameter 8 mm, panel thickness 0.8...1.2 mm
Soldering conditions:	hand-soldering – max. 3 sec, 300 °C
Travel:	1.2 mm

4

Models: Switching function

DPL 1 CB x

off – mom

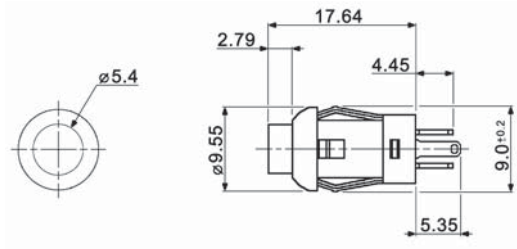

Ordering Code:

DPL 1 CB

LEDs:

- W white
- R red
- Y yellow
- G green
- B blue
- BG blue/green