

Illuminated Pushbutton Switches for SMT

Specifications:



Contact rating:	50 V DC, 250 mA; max. 3,5 VA
Contact resistance:	<50 mΩ at 2–4 V DC, 100 mA
Insulation resistance:	> 1000 MΩ
Dielectric strength:	250 V AC (50–60 Hz) for 1 minute
Operating temperature:	–30 °C to +85 °C
Mechanical life:	minimum 30 000 operations
Material:	case and actuator: glass filled LCP, UL 94 V–0, grey Housing: stainless steel Contact and terminal: copper alloy, silver plated with gold flash
Operating force:	250 ± 100 gf
Mounting:	on pc-board – SMD

4

Models: Switching functions

SPDT
MPLS 12 F □ on – mom


MPLS 12 D □ on – on

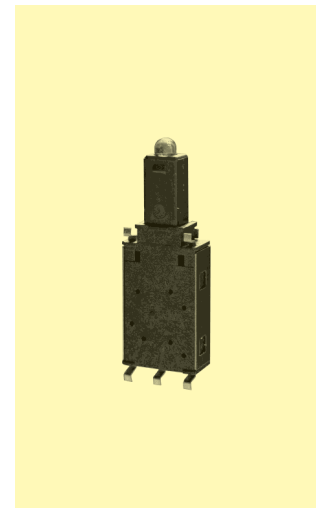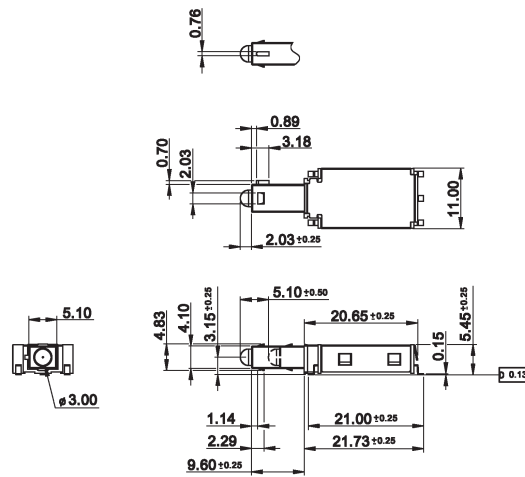


Ordering Code:

MPLS 12 F □

MPLS 12 D □



Circuit diagram



LED colour:

- W white
- Y yellow
- R red
- G green
- B blue
- AG amber/green
- RG red/green

Packing: 450 pcs/reel