



DRILLING PLAN

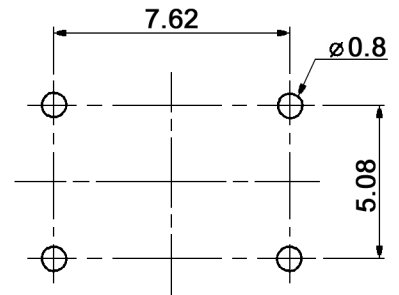

CIRCUIT DIAGRAM



Specifications:

- Contact rating: 20mA, 24V DC; max. 0.5W
- Contact resistance: 100mOhm max.
- Insulation resistance: 1 000MOhm min. at 100V DC
- Dielectric strength: 250V, 50Hz for the duration of 1 minute
- Operating temperature: -40°C to +85°C
- Mechanical life: min. 1 000 000 cycles
- Operating force: 4.5 +/-1.0N; return force: min. 1N
- Travel: 0.45 +/-0.25mm
- Soldering conditions: auto-soldering: max.: 270°C, 5sec.
- Material: Base: thermoplastic UL94V-0, black
Button: silicone, black
Contact disc: stainless steel, 0.025µm gold plated over nickel barrier
Terminal contact: brass, 0.025µm gold plated
Terminal: brass, tin plated
- IP rating: IP 67
- Compliance: RohS II (2011/65/EU)

Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm	Date	Name
	07/14	dr
Modifications	Date	Name

TMP 1

30 31 32

Page

1/1

knitter-switch