



P.C. LAYOUT

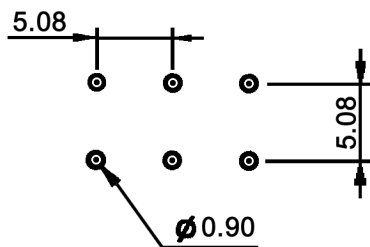

SCHEMATIC



Specifications:

Contact rating: 1A, 250V AC; 3A, 120V AC or 28V DC
 Contact resistance: 50mOhm max.
 Insulation resistance: 1 000MOhm min.
 Dielectric strength: 1 000V RMS
 Operating temperature: -40°C to +85°C
 Mechanical life: 20 000 make-and-break cycles
 Min. load: 100mA, 10V DC
 Soldering conditions: auto-soldering: 260 +/-5°C, max. 10sec.
 Material: Case: nylon, white
 Actuator / housing: nylon, black
 Terminals / contact: silver plated copper alloy



Tolerances:		Date	Name	<h1>MSS 3122 N</h1>
		06/04	us	
Dimensions	11/08	dr		
Specifications	05/08	dr		
Soldering conditions	08/07	dr	knitter-switch	<h2>30 04 58</h2>
Schematic	08/05	dr		
Contact material	11/04	dr		1/1
Modifications	Date	Name		