



Dual-in-line Switches end-stackable


Specifications:

Contact rating:	24 V DC, 25 mA
Contact resistance:	< 100 mΩ
Insulation resistance:	> 100 MΩ
Dielectric strength:	500 V AC (50 Hz or 60 Hz) for 1 minute
Operating temperature:	-40 °C to +90 °C
Mechanical life:	minimum 2 000 operations per pole
Material:	cover/base: PA-9T UL 94 V-0, black; actuator: LCP UL 94 V-0, white
Contacts:	copper, gold-plated at contact area
Terminals:	brass, gold-plated
Construction:	case sealed Series DBS 5000: slide recessed, front sealed with protective tape, washable
Mounting:	on pc-board
Slide position:	OFF
Soldering conditions:	wave soldering – max.: 5 sec, 260 °C

Models:


Series DBS 5000

Type	Poles	Length (A)
DBS 5001	1	2.44 mm
DBS 5002	2	4.98 mm
DBS 5003	3	7.52 mm
DBS 5004	4	10.06 mm
DBS 5005	5	12.60 mm
DBS 5006	6	15.14 mm
DBS 5007	7	17.68 mm
DBS 5008	8	20.22 mm
DBS 5009	9	22.76 mm
DBS 5010	10	25.30 mm
DBS 5012	12	30.38 mm

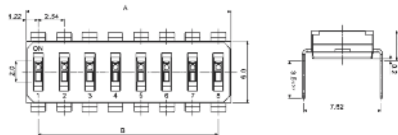

Series DBS 5100

Type	Poles	Length (A)
DBS 5101	1	2.44 mm
DBS 5102	2	4.98 mm
DBS 5103	3	7.52 mm
DBS 5104	4	10.06 mm
DBS 5105	5	12.60 mm
DBS 5106	6	15.14 mm
DBS 5107	7	17.68 mm
DBS 5108	8	20.22 mm
DBS 5109	9	22.76 mm
DBS 5110	10	25.30 mm
DBS 5112	12	30.38 mm

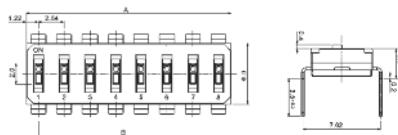

Packing: sticks

