


Dual-in-line Switches end-stackable, for SMT





Specifications:

Contact rating:	24 V DC, 25 mA
Contact resistance:	< 100 mΩ
Insulation resistance:	> 100 MΩ
Dielectric strength:	500 V AC (50 Hz or 60 Hz) for 1 minute
Operating temperature:	-40 °C to +90 °C
Mechanical life:	minimum 2 000 operations per pole
Material:	cover/base: high-temp. PA-9T UL 94 V-0, black; actuator: LCP UL 94 V-0, white
Contact:	copper; gold-plated at contact area
Terminal:	brass, gold-plated
Construction:	case sealed
Mounting:	Series SBS 5000 T: slide recessed, front sealed with protective tape, washable on pc-board – SMD
Slide position:	OFF

Models:


Series SBS 5000 T

Type	Poles	Length (A)
SBS 5001 T	1	2.44 mm
SBS 5002 T	2	4.98 mm
SBS 5003 T	3	7.52 mm
SBS 5004 T	4	10.06 mm
SBS 5005 T	5	12.60 mm
SBS 5006 T	6	15.14 mm
SBS 5007 T	7	17.68 mm
SBS 5008 T	8	20.22 mm
SBS 5009 T	9	22.76 mm
SBS 5010 T	10	25.30 mm
SBS 5012 T	12	30.38 mm

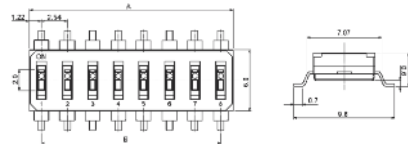

Series SBS 5100 T

Type	Poles	Length (A)
SBS 5101 T	1	2.44 mm
SBS 5102 T	2	4.98 mm
SBS 5103 T	3	7.52 mm
SBS 5104 T	4	10.06 mm
SBS 5105 T	5	12.60 mm
SBS 5106 T	6	15.14 mm
SBS 5107 T	7	17.68 mm
SBS 5108 T	8	20.22 mm
SBS 5109 T	9	22.76 mm
SBS 5110 T	10	25.30 mm
SBS 5112 T	12	30.38 mm

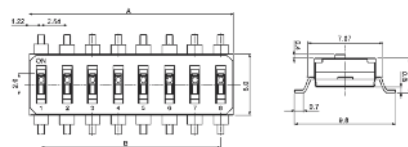

Packing: on tapes (900 pieces; Ø 300 mm)