

Half-Pitch Dual-in-line Switches for SMT


Specifications:

Contact rating:	50 V DC, 100 mA (non-switching), 24 V DC, 25 mA (switching)
Contact resistance:	< 100 mΩ
Insulation resistance:	> 500 MΩ
Dielectric strength:	300V, 50Hz for the duration of 1 minute
Operating temperature:	-40 °C to +85 °C
Storage temperature:	-40 °C to +85 °C
Mechanical life:	minimum 1000 operations per pole
Contacts/Terminals:	copper-alloy, gold-plated over nickel
Material:	PA9T/PA, UL 94 V-0
Construction:	case sealed, slide recessed, sealed with protective tape
Mounting:	on pc-board – SMD – 1.27 mm
Slide position:	OFF

Models:


Series DHS 600

Type	Poles	Length (A)
DHS 602	2	3.70 mm
DHS 604	4	6.20 mm
DHS 606	6	8.75 mm
DHS 608	8	11.30 mm
DHS 610	10	13.80 mm

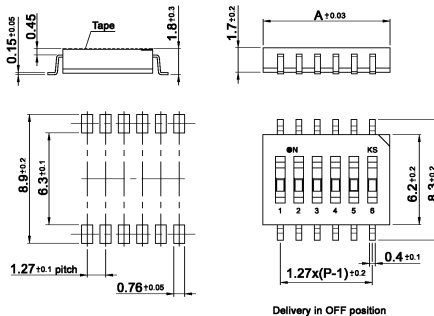


Delivery in OFF position

washable

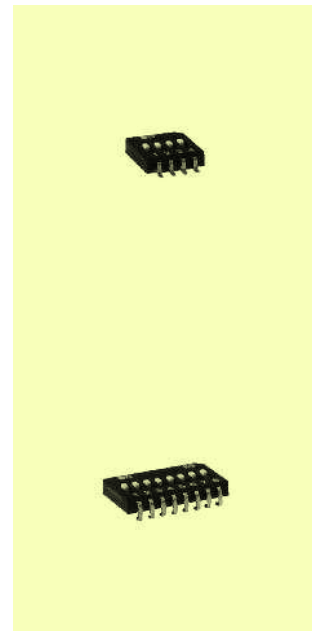

Series DHS 600-J

Type	Poles	Length (A)
DHS 602-J	2	3.70 mm
DHS 604-J	4	6.20 mm
DHS 606-J	6	8.75 mm
DHS 608-J	8	11.30 mm
DHS 610-J	10	13.80 mm

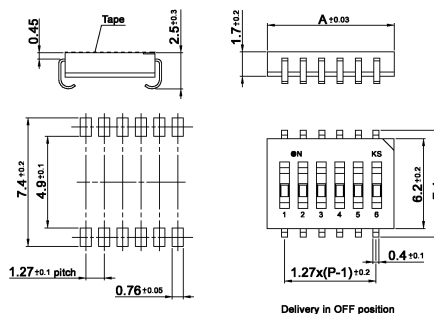

Delivery in OFF position

Packing: on tapes

Models	Tape	Reel	Tape width (A)	Rapport (R)
DHS 602 / DHS 602-J	2000 pieces;	Ø 330 mm	16.0 mm	12.0 mm
DHS 604 / DHS 604-J	2000 pieces;	Ø 330 mm	16.0 mm	12.0 mm
DHS 606 / DHS 606-J	2000 pieces;	Ø 330 mm	16.0 mm	12.0 mm
DHS 608 / DHS 608-J	2000 pieces;	Ø 330 mm	24.0 mm	12.0 mm
DHS 610 / DHS 610-J	2000 pieces;	Ø 330 mm	24.0 mm	12.0 mm